ELCO Lighting

Project Name:


Fixture Type:

Date:

# 3″ NEW CONSTRUCTION HOUSING

**Housing · 3″**


3" new construction housing with a magnetic or electronic transformer. Uses a GU5.3 Bi-Pin socket for use with Bi-Pin LED MR16 lamps.

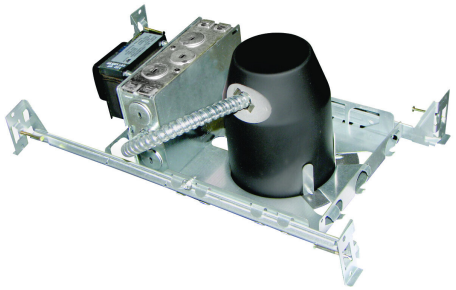

## FEATURES

•Single wall IC construction, for use in insulated or non-insulated ceilings.
•Dimmable.
•Lamp: MR16 GU/GX5.3 bi-pin LED (not included).
•Lamp Holder: MR16 GU/GX5.3 bi-pin socket.
•Trims sold separately.

## DIMENSIONS




## SPECIFICATIONS

| | |
|---|---|
| Wattage | 12W |
| Voltage | 120V |
| Lamp type | LED |
| Aperture | 3" |
| Transformer type | Magnetic Transformer · Electronic Transformer |

## ITEM NUMBERS

| ITEM NUMBER | LAMP TYPE | WATTS | VOLTAGE | TRANSFORMER TYPE |
|---|---|---|---|---|
| **EL2699LDICA** | LED | 12W | 120V | Magnetic Transformer |
| **EL2699LDICEA** | LED | 12W | 120V | Electronic Transformer |

**Item page**
elcolighting.com/items/3-new-construction-housing
Every item number, IES files, downloads and the latest revision.

## PART OF THESE FAMILIES

3″ Low Voltage GU5.3 Housings and Trims

↓ Dimmer compatibility list
elcolighting.com · Dimmer Compatibility List

## TECHNICAL DETAILS

**Construction:**

- IC rated for direct contact with insulation, for use in IC or non-IC conditions.
- Housing adjusts in frame to accommodate up to 1 1/4" ceiling thickness.
- Airtight housing with gasket to restrict airflow in accordance with ASTM E-283 air-tight requirements.
- Aluminum housing for greater heat dissipation. Stamped galvanized steel frame.

**Installation:** Designed for ceiling plenums where 2x6 joists or taller are used. High strength hanger bars can easily be nailed to joists. Maximum hole cutout is 3 3/4". Suitable for T-grid and drop ceiling applications. See installation sheet for detailed information.

**Junction Box:** Positioned to accommodate straight conduit runs. Seven 1/2" trade size pryout conduit knockouts, 4 Romex pryouts with strain relief.

**Hanger Bars:** Pre-installed hanger bars with True Nail facilitate easy installation in regular lumber, engineered lumber, and laminated beams. Integral T-bar slots for easy installation in T-grids. Spans up


© ELCO Lighting 2026. All rights reserved • Rev. 13 Nov 2026 • ELCO Lighting reserves the right to make specification and design changes without notice.

to 24" and can be repositioned 90°. Score lines allow for tool-free hanger bar size reduction. Integral leveling flange allows for single-person installation while aligning the housing with the joists.

**Electrical:**

- Input Voltage: 120V AC.
- Output Voltage: 12V AC.
- Max Wattage: 12W
- Magnetic or electronic transformer available.
- Thermally protected against improper lamping.

**Trims:** Compatible with ELCO Low Voltage MR16 trims.

**Dimmability:**

- Magnetic transformer dims with MLV type dimmers.
- Electronic transformer dims with ELV type dimmers.
- See dimming compatibility list for a list of compatible dimmers.
- Note: Lamp used may affect dimmability.

**Lamp:** Designed for use with GU5.3 MR16 lamps.

**Listings:**

- UL Listed (US and Canada) for Damp Location.
- UL Listed (US and Canada) for Wet Location with select trims.
- UL Listed (US and Canada) for Feed Through.
- UL Listed (US and Canada) for Direct Contact with Insulation and Combustible Material.
- Airtight per ASTM E-283.
- Install a JA8-2025-E lamp/luminaire for Title 24 Compliance.

**Warranty:** ELCO Lighting warrants products will be free from defects in materials and workmanship for a period of 3 years.


© ELCO Lighting 2026. All rights reserved • Rev. 13 Nov 2026 • ELCO Lighting reserves the right to make specification and design changes without notice.