ELCO Lighting

Project Name:

Fixture Type:

Date:

RECESSED FIXTURE FIRE COVER

Accessory

ITEM NUMBER **FIRECVR**



FEATURES

- UL Rated recessed light enclosure stops flame spread and heat transmission for up to 2 hours.
- UL approved for most major ceiling types, including gypsum, sheetrock, suspended drywall and acoustical tiles.
- Made of heat activated intumescent material.

DIMENSIONS

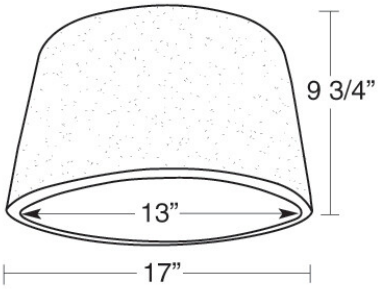

Item page
elcolighting.com/items/recessed-fixture-fire-cover
Every item number, IES files, downloads and the latest revision.

PART OF THESE FAMILIES

5″ LED Housings and Inserts · 5″ Standard Koto™ · 2″ DX Koto™ · 3″ DX Koto™ · 4″ DX Koto™ · 6″ DX Koto™ · 3″ 12V AC Koto™ · 4″ 12V AC Koto™ · 3″ LED Housings and Inserts · 6″ LED Housings and LED Inserts · 2″ Elm™ · Alder™ · 4″ LED Housings and Inserts · 2″ Elm™ Flexa · Architectural Oak™ · 2″ Architectural Koto™ · 2″ Standard Koto™ · 4″ Standard Koto™ · 3″ Standard Koto™ · 2″ Koto™ MAX · 3″ Koto™ MAX · 4″ Koto™ MAX · 6″ Koto™ MAX · 4″ Koto™ Aim · 2″ Koto™ Aim · 3″ Koto™ Aim · 6″ Koto™ Aim

© ELCO Lighting 2026. All rights reserved • Rev. 13 Nov 2026 • ELCO Lighting reserves the right to make specification and design changes without notice.