


0-10V, 120/277V 4" New Construction IC Airtight Housing for 2-Hr Fire Rated Ceilings

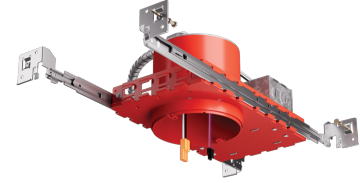

Maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714.


Features

- New Construction IC Airtight Housing for **2-Hour Fire Rated ceilings**
- Junction Box with hanger bars with quick-connect for easy fixture installation
- Round opening for easy hole cutting
- Maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714
- Covered by U.S. Patents

Specifications

| | |
|-----------------|----------|
| Voltage | 120/277V |
| Dimmable | 0-10V |

Dimensions

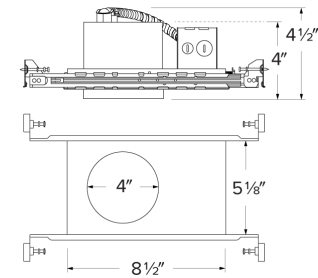

Technical Details

Installation: Hanger bars that can be nailed to joists.

Hanger Bars: Hanger bars with True Nail for easy installation in regular lumber, engineered lumber, and laminated beams. Integral T-bar slots for easy installation in T-Bars. Hanger bars span 24". Score lines allow for tool-free hanger bar size reduction. Integral leveling flange allows for single-person installation while aligning housing with the joists.

Listings:

- IC Rated for direct contact with insulation
- For 2-Hr Fire Rated ceilings
- cUL listed under cUL 514A Standards as a metallic outlet box

Compatible With:

- 4" 0-10V DX Koto™ Fixtures, 0-10V LED Sky™ Panels, and 4" 0-10V LED Inserts (EL495 Series)


Product Numbers

| Item | Description | Voltage | Dimming |
|---------------------|--------------------------|----------|---------|
| EJB4ICDXA | 4" O.D. x 4 1/2" H | 120/277V | 0-10V |
| EJB4ICDXA-EM | Emergency Battery Backup | 120/277V | 0-10V |

Compatible Products

For use with 0-10V, 120/277V Housings for 2-Hour Fire Rated Ceilings

0-10V DX Koto™ LED Module



0-10V DX Koto™
LED Module
ELK10DX

| PRODUCT NUMBER BUILDER | | | | |
|------------------------|------------|-------------|--|--|
| Koto™ LED Module | Lumens | Voltage | Color Temperature | Beam Angle |
| ELK | 10 1000 lm | DX 120/277V | 27 2700K 30 3000K 35 3500K 40 4000K SD Sunset (3000K to 1800K) | (blank) 38° lens (Standard) -S 18° lens -N 25° lens -W 60° lens |

ACCESSORIES



Lens

- EP731C 18° Lens
- EP732C 25° Lens
- EP733C 38° Lens
- EP734C 60° Lens

**EP732C, EP733C, EP734C Included*



Shoot

- L50W White
- L50B Black



Secondary Optics

- L45 Hex Louver (Black)
- L57 Hex Louver (White)
- L46 Linear Lens
- L47 Spread Louver
- L49 Frosted Lens
- L51 Color Shifter
- L52 Blue Optic Lens
- L53 Pink Optic Lens

4" Pex™ Twist-On Trims



Adjustable Gimbal

ELK4129

Finishes:

(W, BB, BZ, B, C, H)




Adjustable Pinhole

ELK4127

Finishes:

(W, BB, BZ, B, H, CP)




Shallow Reflector

ELK4116

Finishes:

(W, H)




Adjustable Gimbal

ELK4229

Finishes:

(W, BB, BZ, B, C, H)




Adjustable Pinhole

ELK4227

Finishes:

(W, BB, BZ, B, N)



Shallow Reflector

ELK4216

Finishes:

(W, H)

4" Unique™ Twist-On Trims




Shallow Reflector

ELK4710

Finishes:

(W, B, BZ)



Shallow Baffle

ELK4713

Finishes:

(W, BZ)



Wall Wash

ELK4715

Finishes:

(W, BZ)




Adjustable Spot

ELK4188

Finishes:

(W, B, BZ)




Square Reflector

ELK4714

Finishes:

(W, B, BZ)



Square Baffle

ELK4716

Finishes:

(W, BZ)

4" Flush Mount Trim Adaptors



Round Adaptor

EL4FMR

- Compatible with ELK4116, ELK4127, ELK4129, ELK4710, ELK4713, ELK4715



Square Adaptor

EL4FMS

- Compatible with ELK4216, ELK4227, ELK4229,

*Finishes: **W** - All White, **BB** - All Black, **BZ** - All Bronze, **B** - Black Reflector w/White Ring, **C** - Chrome Reflector w/White Ring, **H** - Haze Reflector w/White Ring

Compatible Products

For use with 0-10V, 120/277V Housings for 2-Hour Fire Rated Ceilings

4" 120/277V, 0-10V LED Inserts



Round Insert

EL495


Finishes:

(DW, DHW, DCW)

PRODUCT NUMBER BUILDER

| 4" 120/277V LED Inserts | Color Temperature | Finish |
|-------------------------|--|---|
| EL495 | | |
| | 30 3000K (800 lm) 35 3500K (850 lm) 40 4000K (900 lm) | DW All White DHW Haze w/White Ring DCW Chrome w/White Ring |

120/277V, 0-10V Round LED Sky Panels™



0-10V Round LED Sky Panel™

| CAT NO. | SPECIFICATIONS |
|--------------|--|
| ELSP63DXCT3W | White, 6", 14W, 1000 lm, 3000K - 4000K |
| ELSP63DXCT3B | Black, 6", 14W, 1000 lm, 3000K - 4000K |
| ELSP83DXCT3W | White, 8", 17W, 1400 lm, 3000K - 4000K |
| ELSP83DXCT3B | Black, 8", 17W, 1400 lm, 3000K - 4000K |