

Project name:	
Fixture type:	
Date:	

2" Koto Sylo™ Monopoint Fixture

Works with Standard Koto™ LED Module, Koto™ Focus & Koto™ with 5-CCT Switch (Ordered Separately)



Features

- Works with Standard Koto[™] LED Module, Koto[™] Focus & Koto[™] with 5-CCT Switch (Ordered Separately)
- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Standard Fixtures or Fixtures with Stems (12", 24", 36", 48", and 60") available
- Fits 3 1/2" and 4" Octagon and Round Junction boxes
- 90° tilt, 358° rotation

Technical Details

Installation: Twist-On design for tool-less module installation, for use with Koto™ modules only.

Electrical: Module connects to 120 power supply. High-efficiency driver with a power factor >0.9. Start time of less than 0.75 seconds.

Warranty: ELCO Products are built to last with a 5-year Limited Warranty.

Options








Diuck

Dimensions



Product Number

Item	Finish
EKS25MPB	All Black

Product Number Builder Example: EKS25MPW

Koto Sylo™ Fixture	Style	Finish	Length
EKS25			
	MP Monopoint	W All White	Standard
		B All Black	-12 12" Stem ¹
		S Silver	-24 24" Stem ¹
			-36 36" Stem ¹
			-48 48" Stem ¹
			-60 60" Stem ¹


¹ Stem is not field cuttable

Compatible Products




For use with Dedicated 2" Koto Sylo™ Fixtures

Koto™LED Module

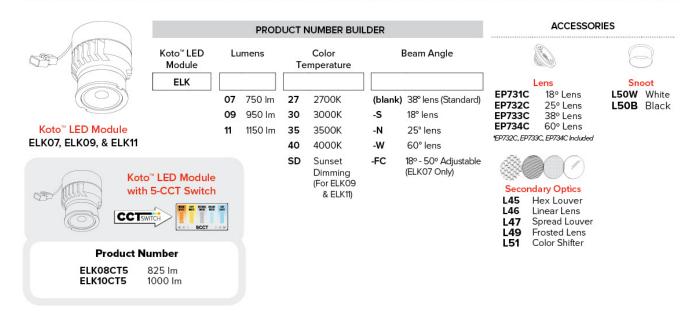

Junction Boxes for Koto Sylo™ Ceiling Mount Fixtures



with Hanger Bars
New Construction

CAT NO.	SPECIFICATIONS
FI 14S	3 ¾" x 3 ¾" x 2 ¾"



Junction Box without Hanger Bars New Construction

CAT NO.	SPECIFICATIONS		
FL 1332	3 ¾" x 3 ¾" x 2 ¾"		

Accessories



Hard Wire Adapter

CAT NO.	SPECIFICATIONS
PSA38	Socket Adapter



4" Hard Wire Adapter

CAT NO. SPECIFICATIONS
PSA38-4 4"

Other Compatible Junction Boxes



3 ½" & 4" Octagon Steel Junction Boxes

4" × 4" × 1 ½" 4" × 4" × 2 ½" 3 ½" × 3 ½" × 1 ½"



4" Round Surface Mount Box

4" O.D. x 11/2"



3 ½" Round Old Work (Non-Metallic)

4 1/4" O.D. x 3 1/2" I.D. x 2 5/8"



3 ½" & 4" Round New Work (Non-Metallic)

4" O.D. × 2 $\frac{3}{16}$ "
3 $\frac{1}{2}$ " O. D × 2 $\frac{3}{4}$ "

Compatible Products



For use with Dedicated 2" Koto Sylo™ Fixtures

2" Accessories



Emergency Battery Backup

CAT NO. SPECIFICATIONS
KEM-LD5 8W, 120/277V