


4" 0-10V Max. Adjustability New Construction IC Airtight Housing

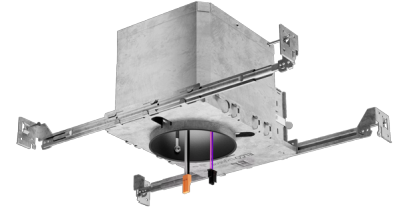

4" New Construction LED Housing compatible with 0-10V LED Koto™ Module.

Features

- Wired for 0-10V Dimming
- 120/277V Input
- Integrated collar allows for use with 5/8" thick to 1 1/2" thick ceilings
- Double Wall IC Airtight for direct contact with Insulation
- Meets restricted air flow requirements (per ASTM E-283)
- cUL Listed for direct contact with Insulation
- cUL Listed for Damp Locations
- cUL Listed for Wet Location with Wet Location Rated Inserts
- cUL Listed for Feed Through
- CA Title 24 Compliant

Specifications

Voltage	120/277V or 120V
Dimmable	0-10V/Triac/ELV

Technical Details

Construction:

- IC rated for direct contact with insulation, for use in IC or Non-IC conditions.
- Housing adjusts in frame to accommodate up to 1 1/2" ceiling thickness.
- Airtight housing with gasket to restrict airflow in accordance with ASTM E-283 air-tight requirements.
- Steel housing for greater heat dissipation. Stamped galvanized steel frame.

Installation: Designed for ceiling plenums where 2x6 joists or taller joists are used. High strength swivel hanger bars can easily be nailed to joists. Maximum hole cutout is 4 1/4". Suitable for T-grid and drop ceiling applications. See installation sheet for detailed information.

Junction Box: Positioned to accommodate straight conduit runs. Seven 1/2" trade size conduit knockouts, four 3/4" knockouts with pry-out knockout slots. 4 Romex pryouts with strain relief.

Hanger Bars: Pre-installed swivel hanger bars with TrueNail facilitate easy installation in regular lumber, engineered lumber, and laminated beams. Integral T-bar slots for easy installation in T-bars. Spans up to 24" and can be repositioned 90°. Score lines allow for tool-free hanger bar size reduction. Integral leveling flange allows for single-person installation while aligning the housings with the joists.

Electrical: Input Voltage: 120/277V. **Emergency Backup:** The fixture becomes 120V only.

Dimmability: Dimmability based on lamp.


Lamp: Designed for use with ELCO 4" Pex™ Twist-On Trims and 0-10V Koto™ LED module

Listings:


- cULus Listed for US and Canada.
- cUL Listed for Damp Location.
- cUL Listed for Wet Location with select trims.
- cUL Listed for Feed Through.
- cUL Listed for Direct Contact with Insulation and Combustible Material.
- Airtight per ASTM E-283.
- Install a JA8-2016-E lamp for Title 24 Compliance.

Warranty: ELCO Lighting warrants products will be free from defects in materials and workmanship for a period of 5 years.

EL485ICDXA



EL485ICDXA-EM




Product Numbers

Item	Description	Voltage	Dimming
EL485ICDXA		120/277V	0-10V/Triac/ELV
EL485ICDXA-EM7	Emergency Battery Backup	120V	0-10V/Triac/ELV

Compatible Products

For use with Dedicated 4" 0-10V Koto ICAD LED Housings

0-10V Koto™ LED Module



**0-10V Koto™
LED Module
ELK10DX**

PRODUCT NUMBER BUILDER				
0-10V Koto™ LED Module	Lumens	Voltage	Color Temperature	Beam Angle
ELK				
	10 1000 lm	DX 120/277V	27 2700K	(blank) 38° lens (Standard)
			30 3000K	-S 18° lens
			35 3500K	-N 25° lens
			40 4000K	-W 60° lens
			SD Sunset Dimming	

ACCESSORIES



Lens

- EP731C** 18° Lens
- EP732C** 25° Lens
- EP733C** 38° Lens
- EP734C** 60° Lens

*EP732C, EP733C, EP734C Included



Snoot

- L50W** White
- L50B** Black



Secondary Optics

- L45** Hex Louver
- L46** Linear Lens
- L47** Spread Louver
- L49** Frosted Lens
- L51** Color Shifter

4" Pex™ Round Twist-On Trims



Recommended to be used with Maximum Adjustability Housing




Reflector

ELK4118

Finishes:

(W, BB, BZ, B, C, H)




Adjustable Gimbal

ELK4129

Finishes:

(W, BB, BZ, B, C, H)



Adjustable Pinhole

ELK4127

Finishes:

(B, BB, BZ)



Adjustable Baffle

ELK4193

Finishes:

(W, BB, B)




Slot Aperture

ELK4130

Finishes:

(W)



Rotatable Slot Aperture

ELK4120

Finishes:

(W)



Adj. Wall Wash

ELK4122

Finishes:

(W)


Compatible Products

For use with Dedicated 4" 0-10V Koto ICAD LED Housings


4" Pex™ Square Twist-On Trims




Reflector
ELK4218
Finishes:
(W, BB, BZ, B, C, H)




Adjustable Gimbal
ELK4229
Finishes:
(W, BB, BZ, B, C, H)



Adjustable Pinhole
ELK4227
Finishes:
(B, BB, BZ)




Adjustable Phenolic Baffle
ELK4293
Finishes:
(W, BB, B)




Adj. Slot Rotatable Aperture
ELK4220
Finishes:
(W)



Adjustable Wall Wash
ELK4222
Finishes:
(W)



Adjustable Reflector
ELK4282
Finishes:
(W)




Adjustable Baffle
ELK4284
Finishes:
(W)


4" Flexa™ Twist-On Trims




Round Reflector
ELK4721
Finishes:
(WW, BB, BZBZ, BW, CC, CW, HW, CN)




Round Baffle
ELK4723
Finishes:
(WW, BB, BZBZ, BW)



Square Reflector
ELK4741
Finishes:
(WW, BB, BZBZ, BW, HW)
**Not for Remodel Housing*



Square Baffle
ELK4743
Finishes:
(WW, BB, BZBZ, BW)
**Not for Remodel Housing*




Adjustable Square Reflector
ELK4759
Finishes:
(WW, BB, B, H)


Compatible Products

For use with Dedicated 4" 0-10V Koto ICAD LED Housings

4" Pex™ Trimless • Only for use with EL485ICDXA & EL490AJICDXA



**Round Spackle
Frame Only**
EL4SFR




Round Smooth Reflector
ELK408
Finishes:
(W, B, BZ, H)



**Round Adjustable
Reflector**
ELK415
Finishes:
(W, B, BZ, H)




**Adjustable Reflector
with Spackle Frame**
ELK430
Finishes:
(W, B, BZ, H)




**Adjustable Baffle
with Spackle Frame**
ELK434
Finishes:
(W, B, BZ)



Sq. Spackle Frame
EL4SFS




Sq. Smooth Reflector
ELK445
Finishes:
(W, B, H)




Sq. Adjustable Reflector
ELK459
Finishes:
(W, B, H)

4" Flush Mount Trim Adaptors




Round Flush Mount
EL4FMR
For use with
ELK41 & Unique™ Trims



Square Flush Mount
EL4FMS
For use with
ELK42 Trims

4" Accessories



Emergency Battery Backup


CAT NO.	SPECIFICATIONS
KEM-LD5	8W, 120/277V

* Requires access from above




Fire Cover

CAT NO.	SPECIFICATIONS
FIRECVR	9 3/4" H x 17" O.D.



Fire Enclosure

CAT NO.	SPECIFICATIONS
FIREENCL	20 3/8" L x 14 3/8" W
FIREENCL-S	Shallow, 16" L x 14 3/8" W



Mica Fire Tape

CAT NO.	SPECIFICATIONS
FIRETAPE	3/4" W x 16' L