


# 4" 0-10V Shallow Remodel Dedicated LED Housing

4" Shallow remodel dedicated LED housing. Compatible with 4" 0-10V LED inserts.

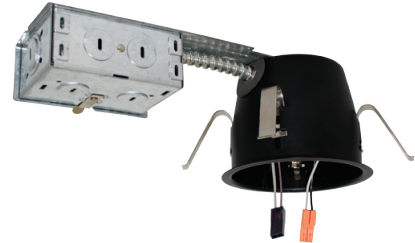


## Features

- Wired for 0-10V Dimming
- Single wall IC Airtight rated for Direct Contact with Insulation
- 120/277V Input
- Meets restricted air flow requirements (per ASTM E-283)
- UL Listed for direct contact with Insulation
- UL Listed for Damp Locations
- UL Listed for Wet Location with Wet Location Rated Inserts
- UL Listed for Feed Through
- CA Title 24 Compliant

## Specifications

<b>Wattage</b>	14W
<b>Voltage</b>	120/277V
<b>Wet Location</b>	Listed
<b>Damp Location</b>	Listed

## Dimensions

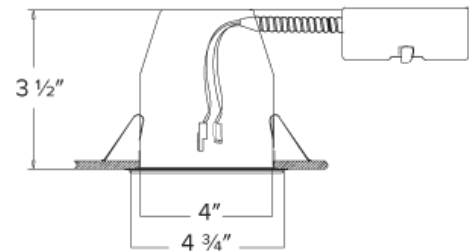

## Technical Details

### Construction:

- Shallow single wall IC rated for direct contact with insulation, for use in IC or non-IC conditions.
- Housing adjusts in frame to accommodate up to 1 1/4" ceiling thickness.
- Airtight housing with gasket to restrict airflow in accordance with ASTM E-283 air-tight requirements.
- Steel housing for greater heat dissipation.

**Installation:** Designed for ceiling plenums where 2x6 joists or taller joists are used. Maximum hole cutout is 4 1/4". Suitable for T-grid and drop ceiling applications. See installation sheet for detailed information.

### Electrical:

- Input Voltage: 120/277V.
- Inherently protected.

### Dimmability:

- Dimmability based on lamp.

**Lamp:** Designed for use with ELCO 4" 0-10V LED inserts.

### Listings:

- UL Listed for Damp Location.
- UL Listed for Wet Location with select trims.
- UL Listed for Feed Through.
- UL Listed for Direct Contact with Insulation and Combustible Material.
- Airtight per ASTM E-283.
- Install a JA8-2016-E lamp/luminaire for Title 24 Compliance.

**Warranty:** ELCO Lighting warrants products will be free from defects in materials and workmanship for a period of 3 years.

## Product Numbers

Item	Description	Watts	Voltage
EL492RICDXA	4" Shallow Remodel	14W	120/277V

# Compatible Products

For use with Dedicated 4" IC LED Housings



## 4" Ply™ 0-10V Dimmable, 120/277V LED Inserts

---



**Round Insert**

**EL495**

Finishes:

(DW, DHW, DCW)

### PRODUCT NUMBER BUILDER

4" 120/277V LED Inserts	Color Temperature	Finish
<input type="text" value="EL495"/>	<input type="text"/>	<input type="text"/>
	<b>30</b> 3000K (800 lm)	<b>DW</b> All White
	<b>35</b> 3500K (850 lm)	<b>DHW</b> Haze w/White Ring
	<b>40</b> 4000K (900 lm)	<b>DCW</b> Chrome w/White Ring