


# 4" Cedar System Non-IC New Construction Housing w/ Driver

Non-IC Airtight housing for high-end residential and light commercial, 1600 lumens.

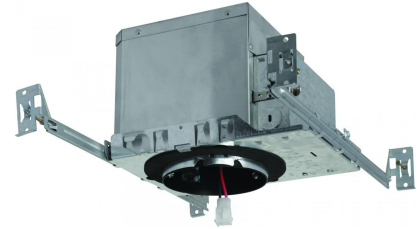


## Features

- USA designed and assembled.
- Limited 5 year warranty.
- For use with ELCO Cedar™ System 4" LED Light Engines.
- 2 at the end of the item number denotes Generation 2. Please note Gen 2 and Gen 1 are not cross compatible.

## Specifications

<b>Lumens</b>	1600 lm
<b>Voltage</b>	120/277V
<b>Dimmable</b>	Triac/ELV/0-10V

## Dimensions



## Technical Details

**Construction:** Non-IC Frame for non-IC conditions. Housing adjusts in frame to accommodate up to 1 1/2" ceiling thickness.

**Installation:** Designed for ceiling plenums where 2x6 joists or taller are used. High strength hanger bars can easily be nailed to joists. Suitable for T-grid and drop ceiling applications. See installation sheet for detailed information.

**Junction Box:** Positioned to accommodate straight conduit runs. Two 3/4" knockouts, Seven 1/2" trade size conduit knockouts, One 3/8" knockout. Four Pry-out knockout slots for easy romex installation.

**Hanger Bars:** Pre Installed hanger bars with True Nail easy installation in regular lumber, engineered lumber, and Laminated Beams. Integral T-bar slots for easy installation in T-Bars. Spans up 24" and can be repositioned 90°. Score lines allow for tool-free hanger bar size reduction. Integral leveling flange allows for single-person installation while easily aligning the housings with the joists.

**Electrical:** Driver is rated for 120V and 277V input (120/277V). High Efficiency driver with a power factor > 0.95.

**Dimmability:** 3 in 1 dimming: Triac, ELV and 0-10V dimming in one driver. 0-10V dimming down to 5% with a compatible dimmer. Can be specified with Lutron drivers for 0.1% and 1% dimming. For a full list of dimmers refer to the Dimmer Compatibility List.

**Emergency Battery Pack:** Optional 90 minute battery pack available with test indicator switch. Note that double wall housings require Access From Above Ceiling for Battery Maintenance.

**Listings:** cUL Listed for Damp Location and for Wet Location with select trims. cUL Listed for Feed Through.

## Product Number

Item	Lumens	Voltage	Dimming
<b>E4LC16D2</b>	1600 lm	120/277V	Triac/ELV/0-10V

## Product Number Builder Example: E4LC162

ELCO Cedar 4" Housing	Lumens	Dimming	Generation	Optional
<b>E4LC</b>	<b>16</b> 1600 lm	<b>D</b> 120V Triac/ELV <b>SD</b> 120/277V Triac/ELV/0-10V <b>L</b> Sunset <b>L</b> Lutron	<b>2</b> Gen 2 Gen 1	No EM <b>EM1</b> Em. battery up to 700 lm <b>EM2</b> Em. battery up to 1100 lm

# Compatible Products



For use with 4" Cedar™ Non-IC LED housings

## 4" Cedar™ LED Light Engines



**Round Reflector Trim**

**E410C**

Finishes:

(W, B, C, H, BZ, BB, MW, MB)



**Wall Wash Reflector Trim**

**E411C**

Finishes:

(W, B, C, H, BZ, BB, MW, MB)



**Drop Glass Reflector Trim**

**E412C**

Finishes:

(W, B, C, H, BB, MW, MB)



**Round Baffle Trim**

**E414C**

Finishes:

(W, B, BZ, BB)



**Round Pinhole Trim**

**E429C**

Finishes:

(W, B, C)



**Square on Sq. Baffle Trim**

**E415C**

Finishes:

(W, BZ)



**Square on Sq. Reflector Trim**

**E417C**

Finishes:

(W, BZ)



**Round on Sq. Reflector Trim**

**E420C**

Finishes:

(W, C, H, BZ, BB)



**Round on Sq. Baffle Trim**

**E424C**

Finishes:

(W, B, BZ, BB)



**Round Adjustable Trim**

**E418C**

Finishes:

(W, C, BB, BZ)



**Square Adjustable Trim**

**E428C**

Finishes:

(W, C, BB, BZ)

### PRODUCT NUMBER BUILDER

4" Cedar™ Trim	Style	Lumen	Color Temperature	Finish
<b>E4</b>				
	<b>10C</b> Reflector	<b>16</b> 1600 lm (18W)	<b>27</b> 2700K	<b>W</b> All White
	<b>11C</b> Wall Wash		<b>30</b> 3000K	<b>B</b> Black w/White Ring
	<b>12C</b> Drop Glass		<b>35</b> 3500K	<b>BZ</b> All Bronze
	<b>14C</b> Baffle		<b>40</b> 4000K	<b>BB</b> All Black
	<b>15C</b> Sq. on Sq. Baffle		<b>50</b> 5000K	<b>C</b> Chrome w/White Ring
	<b>17C</b> Sq. on Sq. Reflector		<b>SD</b> Sunset Dimming	<b>H</b> Haze w/White Ring
	<b>18C</b> Round Adjustable			<b>MW</b> Matte White
	<b>20C</b> Round on Sq. Reflector			<b>MB</b> Matte Black
	<b>24C</b> Round on Sq. Baffle			
	<b>28C</b> Square Adjustable			

# Compatible Products

For use with 4" Cedar™ Non-IC LED housings

## 4" Accessories

---



**Fire Cover**

CAT NO.	SPECIFICATIONS
FIRECVR	9 3/4" H x 17" O.D.



**Fire Enclosure**

CAT NO.	SPECIFICATIONS
FIREENCL	20 3/8" L x 14 3/8" W
FIREENCL-S	Shallow, 16" L x 14 3/8" W



**Mica Fire Tape**

CAT NO.	SPECIFICATIONS
FIRETAPE	3/4" W x 16' L