

Project name:

Fixture type:

Date:

# **4" Phenolic Step Baffle Trim**

### Features

- Phenolic Step, Metal Ring.
- Lamp: 40W A19 or R16, 50W PAR20 or R20
- O.D.: 4 3/4".

### **Technical Details**

#### Construction:

- Meticulously manufactured trim with a powder coated or anodized finish.
- Baffle helps reduce glare.

Installation: Clips securely mount trim into the housing and keeps ring flush with ceiling.

Compatible Housing: Compatible with 4"Line Voltage IC and Non-IC versions.

Lamp: Compatible with Medium base (E26) PAR type.





## Product Number Builder Example: EL993W

Finish

EL993	
w	All White
В	Black with White Trim
N	All Nickel
BB	All Black
BZ	All Bronze
BN	Black with Nickel Trim
NB	Nickel with Black Trim
W	White with Nickel Trim
NW	Nickel with White Trim
BB	Z Black with Bronze Trim
BZ	N Bronze with White Trim
WE	Z White with Bronze Trim

# **Compatible** Products


For use with 4" Trims for PAR Lamps



## 4" Line Voltage ICA Housings



4" Airtight IC Housing Double Wall Construction




4" Airtight Housing New Construction



4" Airtight IC Housing New Construction


CAT NO.	SPECIFICATIONS	CAT NO.	SPECIFICATIONS	CAT NO.	SPECIFICATIONS
EL99ICA	Lamp: 50W MAX.	EL99A	Lamp: 50W MAX.	EL99LDICA	Lamp: LED 12W MAX.



4" Airtight IC Housing with GU24 Base Socket
New Construction

4" Airtight IC 2-Hour Fire Rated Housing New Construction

CAT NO.	SPECIFICATIONS	CAT NO.	SPECIFICATIONS
EL99ICA-G24	Lamp: 18W MAX.	EL99FICA	Lamp: 35W MAX.

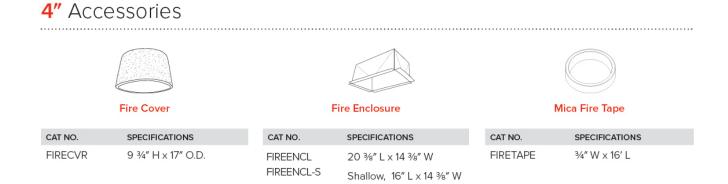

2042 E. Vernon Ave., Vernon, CA 90058 • Tel (323) 231-2600 Fax (323) 231-3200 • elcolighting.com © ELCO Lighting 2025. All rights reserved • Rev. 03 Mar 2025 • ELCO Lighting reserves the right to make specification and design changes without notice.