

4" Ply Sylo™ Pendant

This unique Ply Sylo™ LED Pendant gives you the options you are looking for. Engineered with energy-efficient LED technology and dimming options for your project.




Features

- Modern Pendant Die-Cast aluminum fixture for easy maintenance and upgrades
- Integral EM option 15W Max, for over 15W use EJB4ICA-EM5 external EM and housing
- Available with 120" Field Cuttable Cable or Stems (12", 24", 36", 48", 60", 72" and 84")
- Fits 3 1/2" and 4" Octagon and Round Junction boxes
- Manual switch to choose desired Color Temperature and Lumen Output
- 120V Triac/ELV dimming or 120/277V 0-10V dimming options available
- Soft white lens provides smooth lumen distribution and eliminates LED pixelation
- 90+ CRI for extremely accurate color rendering
- CA Title 24, ETL listed, ENERGY STAR, JA8-2022-E
- Life span of 50,000 hours L70

Specifications

Wattage	9.5, 13.5, 18W
Lumens	850, 1000, 1500 lm
Voltage	120/277V
Color Temp.	2700K, 3000K, 3500K, 4000K, 5000K
Dimmable	0-10V
Lamp Type	LED
CRI	90+
Wet Location	Listed

Options

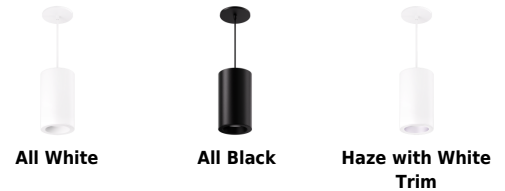

Technical Details

Optics: Frosted polycarbonate lens diffuses light evenly throughout while reducing glare with LED Array technology.

Construction: Integrated driver and light engine with quick connect. Diecast aluminum body with heat sink allows for efficient cooling. High quality powder coat finish preventing rust and paint cracking.

Installation: Included bracket mounts to 3 1/2" and 4" Octagon and Round Junction boxes.

Electrical: Specifiable in 120V or 120/277V input. High Efficiency driver with a power factor > 0.9. Start time of less than .75 seconds.


Emergency Battery Backup: Integral EM Test Switch on Cylinder. The fixture becomes 120V only. Integral EM option 15W Max, for over 15W use EJB4ICA-EM5 external EM and housing

LED Technology: Extremely accurate Color Rendering Index of 90+. Lumen Maintenance of 50,000 hours L70 Life based on LM80 standardized test results. Superior Thermal Management by utilizing integrated heat sink. Instant On to Full Brightness technology. No LED pixelation.

Dimmability: Optional Triac/ELV or 0-10V dimming. For full list of dimmers, refer to the Dimmer Compatibility List. Industry-leading dimming that dims smoothly with no hot spots or flickering.

Listings: cUL Listed for Wet Locations. RoHS Compliant. Meets Energy Star & California Title 24 JA8-2019 standards.

Warranty: ELCO Products are built to last with a 5-year Limited Warranty.



Product Number

Item	Lamp type	Lumens	CCT	Watts	Voltage	Dimming	Finish
EPD475L3CT5W	LED	850,	2700K,	9.5,	120/277V	0-10V	All White
		1000,	3000K,	13.5,			
		3500K,	4000K,	18			
		1500 lm	5000K				

Product Number Builder Example: EPD427L3CT5W

4" Ply Sylo™ Pendant	Dimming	Lumen Output (Wattage)	Color Temp.	Color Finish	Length	Optional
EPD4	27 120V, Triac/ELV ^{1,2}	L3 up to 1500 lm (18W MAX.) ^{5,6}	CT5 2700K-5000K ⁹	W All White	120" Cable Mount ¹¹	No Emergency Battery
	75 120/277V, 0-10V ^{3,4}	10 1000 lumen (15W) ^{7,8}		BB All Black ¹⁰	-12 12" Stem ¹²	EM Em. battery 15W MAX. ¹³
				HW White with Haze Reflector	-24 24" Stem ¹²	
					-36 36" Stem ¹²	
					-48 48" Stem ¹²	
					-60 60" Stem ¹²	
					-72 72" Stem ¹²	
					-84 84" Stem ¹²	

¹ Only available as 120V input

² Lumen Switch: 1000/1250/1500 lm (12.5/16/18W)

³ Only available as 120/277V input

⁴ Lumen Switch: 850/1000/1500 lm (9.5/13.5/18W)

⁵ Lumen Switch located on module

⁶ With 0-10V Lumen Switch: 850/1000/1500 lm, with 0-Triac/ELV Lumen Switch: 1000/1250/1500 lm

⁷ Only available as Triac/ELV

⁸ Only available in White and Haze

⁹ Color Temperature Switch located on module

¹⁰ Only for L3 Option

¹¹ 120 inch field cuttable cable

¹² Stem is not field cuttable

¹³ The fixture becomes 120V only