


4" Square Sky Panel™

Edge-Lit LED Technology with glare control lens for even glow

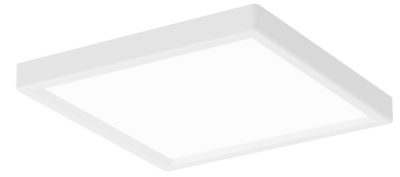

Features

- Fits 3", 3 1/2" and 4" Octagon and Round junction boxes
- Fits 4" housings with optional [ELSPMNT468](#) mounting accessories
- Dimmable to 10% with select dimmers
- Edge-lit LED technology
- IC Rated and Wet Location Rated
- ETL Listed
- JA8 2016 E-Compliant
- 4 3/8" Sq. x 5/8" H

Specifications

Wattage	10W
Lumens	600 lm - 650 lm
Voltage	120V
Color Temp.	2700K, 3000K, 3500K, 4000K, 5000K - 4000K
Dimmable	Triac/ELV
Lamp Type	LED
CRI	90+
Wet Location	Listed

Options




White



Black

Dimensions



Product Numbers

Item	Lamp type	Lumens	CCT	Watts	Voltage	Dimming	Finish
ELSP4430W	LED	600 lm	3000K	10W	120V	Triac/ELV	All White
ELSP4430B	LED	600 lm	3000K	10W	120V	Triac/ELV	All Black
ELSP4440W	LED	650 lm	4000K	10W	120V	Triac/ELV	All White
ELSP4440B	LED	650 lm	4000K	10W	120V	Triac/ELV	All Black
ELSP44CT5W	LED	600 lm	2700K, 3000K, 3500K, 4000K, 5000K	10W	120V		All White

Product Number Builder Example: ELSP4430W

4" Square Sky Panel™

Color Temp

Finish

ELSP44

30 3000K
40 4000K
CT5 2700K - 5000K


W All White
B All Black

4" Square Sky Panel

Multiplier: 4000K (x 1.08)

PHOTOMETRIC REPORT

Product #: ELSP4430
 Wattage/Lumens: 9.4W/ 468 lm
 Luminaire LPW: 50 Lm/W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	168
5	167
15	161
25	151
35	135
45	114
55	89
65	60
75	31
85	5
90	0

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	10.5	11.6'
6'	4.65	17.4'
8'	2.62	23.1'
10'	1.68	28.9'

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30°	130.35	27.80
0-40°	213.81	45.60
0-60°	377.41	80.60
0-90°	468.49	100.00