

# 5" Adjustable Pull Down LED Light Engine



## Features

- Frosted Lens provides smooth lumen distribution and eliminates LED pixelation.
- ENERGY STAR® Certified. California Title 24 (JA8-2016).
- Life Span of 50,000 Hours L70.
- Deep set LED reduces glare while providing area illumination.
- Compatible with ELCO Maple™ system frame.

## Specifications

<b>Wattage</b>	16W
<b>Lumens</b>	1100 lm
<b>Color Temp.</b>	3000K - 4000K
<b>Lamp Type</b>	LED
<b>Beam Angle</b>	100°
<b>CRI</b>	93+
<b>Damp Location</b>	Listed

## Options



White



Bronze

## Technical Details

**Optics:** Polycarbonate diffuser with internal reflector create a uniform light distribution with minimal glare.

**Construction:** IC Rated for Direct Contact with Insulation in E5SQLFU11 housing. Diecast aluminum heatsink for greater heat dissipation. High quality powder coat finish preventing rust and paint cracking. Adjustable pull down to 85° and rotation of 356°.

### Electrical:

- 1100 Lumen uses 16W.
- 120/277V input with E5SQLFU frame.

### LED Technology:

- Extremely accurate color rendering with 93+ CRI.
- Efficacy of 68 lumens per watt.
- Lumen Maintenance of 50,000 hours L70 Life based on LM80 standardized test results.
- Superior Thermal Management by utilizing aluminum heat sink.

### Dimmability:

- Flicker-Free Dimming.
- E5SQLFU11 works with Triac/ELV type dimmers with 1100 Lumen Light Engine.
- Smoothly dims down to 10%. Dimming range may vary depending on dimmer model.
- For full list of dimmers refer to the Dimmer Compatibility List.

**Listings:** cUL/cUL Listed for Damp Location.


cUL Listed for Direct Contact with Insulation and Combustible Material.

ENERGY STAR® Certified. California Title 24 (JA8-2016).

Certified under ASTM-E283 for Air Tight Construction.

**Warranty:** ELCO Products are built to last. 5-year Limited warranty.

## Dimensions



## Product Numbers

Item	Lamp type	Lumens	CCT	Watts	Beam Angle	Finish
<b>E523L1130BZ</b>	LED	1100 lm	3000K	16W	100°	All Bronze
<b>E523L1140BZ</b>	LED	1100 lm	4000K	16W	100°	All Bronze
<b>E523L1130W</b>	LED	1100 lm	3000K	16W	100°	All White
<b>E523L1140W</b>	LED	1100 lm	4000K	16W	100°	All White

**Product Number Builder** Example: **E523L1130BZ**

ELCO 5" Adjustable Pull-Down Light Engine

Color Temp.

Finish

**E523L11**

**30** 3000K  
**40** 4000K


**W** All White  
**BZ** All Bronze

# Compatible Products




For use with 5" Maple™ LED Square Light Engines

## 5" Maple™ IC Shallow Frame with Driver

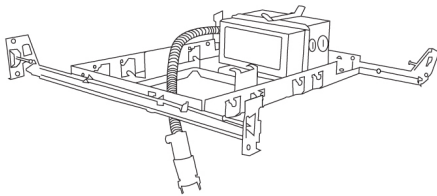

IC Shallow Frame  
**Plaster Frame**

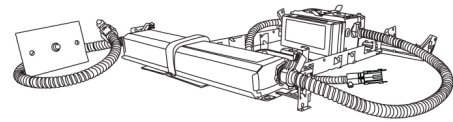

Optional:  
**Emergency Battery Backup**

CAT NO.	SPECIFICATIONS
E5SQLFU11	1100 lm
E5SQLFU20	2000 lm


CAT NO.	SPECIFICATIONS
E5SQLFU11EM1	1100 lm (Up to 750 lm Emergency Output)
E5SQLFU11EM2	1100 lm (Up to 1100 lm Emergency Output)
E5SQLFU20EM1	2000 lm (Up to 750 lm Emergency Output)
E5SQLFU20EM2	2000 lm (Up to 1100 lm Emergency Output)

# LED Light Engine

Multiplier: 4000K (x 1.08)

## PHOTOMETRIC REPORT

Product #: E523L1130  
 Wattage/Lumens: 15.9W/ 1140 Lm  
 Luminaire LPW: 72 Lm/W



## CANDLE POWER SUMMARY

Degrees Vertical	0°
0	499
5	496
15	469
25	420
35	352
45	270
55	186
65	102
75	32
85	5
90	0

## ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	31.2	8.9'
6'	13.9	13.4'
8'	7.80	17.9'
10'	4.99	22.3'

## ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30°	374.59	32.80
0-40°	597.24	52.40
0-60°	982.50	86.20
0-90°	1140.31	100.00



**ELCO Lighting**

# Dimmer Compatibility Chart

## 5" Maple System LED Light Engines

For E520L, E521L, E523L, and E524L Series

### For Reference Only

Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

Manufacturer	Product	Part Number	Dimmed Light Output Range
Lutron	Skylark Contour, 120V AC, 60Hz, 600W Incandescent/Halogen, Single Pole, 3-Way Indoor Application, Residential/Commercial Application	CT-603PG / CT-600PR	10% - 100%
	Diva, 120V AC, 60Hz, 600W Incandescent/Halogen, Single Pole, 3-Way, Residential/Commercial Application	DV-600PR / DV603PG	10% - 100%
	Diva, 120V, 60Hz, 150W LED/CFL, 600W Incandescent/Halogen, Single Pole, 3-Way	DVW-603PGH / DVCL-153P	10% - 100%
	Maestro, 120V, 50/60Hz, 150W LED/CFL, 600W Incandescent/Halogen, Single Pole, 3-Way	MACL-153M / TGCL-153P	10% - 100%
	Skylark, Single Pole 600W Incandescent/Halogen, Slide-to-Off Dimmer	S-600PR / S-2-LH	10% - 100%
Leviton		1A1505 / IC1605	10% - 100%
	SureSlide, 120V AC 60Hz, 600W for LED and CFL, 600W for Incandescent, Single Pole, 3-Way, Polycarbonated Housing	6631 / 6633	10% - 100%
Cooper	Decorator Dimmer, 120V 60Hz, 300W for LED and CFL, 600W for Incandescent, Single Pole, 3-Way, Polycarbonated Housing	DLC03P	10% - 100%

**\*NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details**

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.

Integrating our lighting with your Smart Home System is a breeze. Simply check your Smart Home system for compatible smart switches and cross reference that with our Dimming Compatibility Chart. Once the switches are integrated with your Smart Home system your lights will be ready to go.



2042 E. Vernon Ave. Vernon CA 90058 Tel 323.231.2600 Fax 323.231.3200 [elcolighting.com](http://elcolighting.com)