

# 6" 0-10V Shallow Remodel Dedicated LED Housing




## Features

- Wired for 0-10V Dimming
- Airtight rated
- 120/277V Input
- Meets restricted air flow requirements (per ASTM E-283)
- Shallow for Non-IC Application

## Specifications

<b>Voltage</b>	120/277V
<b>Dimmable</b>	0-10V/Triac/ELV
<b>Lamp Type</b>	LED

## Dimensions

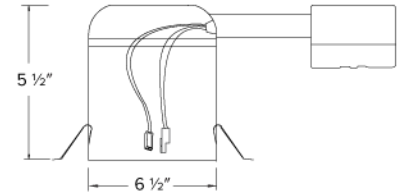

## Product Number

Item	Lamp type	Voltage	Dimming
EL760RICDXA	LED	120/277V	0-10V/Triac/ELV

# Compatible Products



For use with Dedicated 6" IC LED Housings

## 6" Ply™ 0-10V Dimmable, 120/277V LED Inserts



Round Insert

EL695

Finishes:

(DW, DHW, DCW)

### PRODUCT NUMBER BUILDER

6" 120/277V LED Inserts	Color Temperature	Finish
EL695		
	30 3000K (1350 lm)	DW All White
	35 3500K (1425 lm)	DHW Haze w/White Ring
	40 4000K (1500 lm)	DCW Chrome w/White Ring

## 6" Ply™ 0-10V Dimmable, 120/277V Adjustable LED Inserts



Round Adjustable Pull Down

EL697

Finishes:

(DXW, DXB, DXBZ, DXN)

### ACCESSORIES



Interchangeable Lens  
(For EL697 Series only)

EP710C 20° Beam  
EP712C 60° Beam


### PRODUCT NUMBER BUILDER

6" 120/277V Adjustable LED Inserts	Style	Color Temperature	Finish
EL6			
	97 Round Adjustable	27D 2700K (850 lm)	DXW All White
		30D 3000K (900 lm)	DXB All Black
			DXBZ All Bronze
			DXBN All Nickel

# Compatible Products

For use with Dedicated 6" 0-10V Koto ICAD LED Housings

## 0-10V Koto™ LED Module




0-10V Koto™  
LED Module  
ELK10DX


PRODUCT NUMBER BUILDER				
0-10V Koto™ LED Module	Lumens	Voltage	Color Temperature	Beam Angle
ELK				
	10 1000 lm	DX 120/277V	27 2700K	(blank) 38° lens (Standard)
			30 3000K	-S 18° lens
			35 3500K	-N 25° lens
			40 4000K	-W 60° lens
			SD Sunset Dimming	

ACCESSORIES	
<b>Lens</b>	<b>Snoot</b>
<b>EP731C</b> 18° Lens	<b>L50W</b> White
<b>EP732C</b> 25° Lens	<b>L50B</b> Black
<b>EP733C</b> 38° Lens	
<b>EP734C</b> 60° Lens	
<small>*EP732C, EP733C, EP734C Included</small>	
<b>Secondary Optics</b>	
<b>L45</b> Hex Louver	
<b>L46</b> Linear Lens	
<b>L47</b> Spread Louver	
<b>L49</b> Frosted Lens	
<b>L51</b> Color Shifter	


## 6" Twist-On Trims



**Round Deep Reflector**  
ELK6418  
Finishes:  
(W, BB, BZ, H)




**Round Reflector**  
ELK610  
Finishes:  
(WW, BB, BZBZ, BW, CC, CW, CN, HW)



**Adj. Round Reflector**  
ELK629  
Finishes:  
(WW, BB, BZBZ, BW, CW, HW)




**Adj. Round Baffle**  
ELK693  
Finishes:  
(WW, BB, BZBZ, BW)




**Adj. Slot Aperture**  
ELK6420  
Finishes:  
(W)

## 6" Unique™ Twist-On Trims



**Round Reflector**  
ELK6710  
Finishes:  
(W, B, BZ)




**Round Baffle**  
ELK6713  
Finishes:  
(W, BZ)



**Round Wall Wash**  
ELK6715  
Finishes:  
(W, BZ)

## 6" Accessories



**Emergency Battery Backup**

CAT NO.	SPECIFICATIONS
KEM-LD5	8W, 120/277V

\* Requires access from above



**Fire Cover**

CAT NO.	SPECIFICATIONS
FIRECVR	9 3/4" H x 17" O.D.



**Fire Enclosure**

CAT NO.	SPECIFICATIONS
FIREENCL	20 3/8" L x 14 3/8" W
FIREENCL-S	Shallow, 16" L x 14 3/8" W



**Mica Fire Tape**

CAT NO.	SPECIFICATIONS
FIRETAPE	3/4" W x 16' L