

6" 0-10V Shallow Remodel Dedicated LED Housing




Features

- Wired for 0-10V Dimming
- Airtight rated
- 120/277V Input
- Meets restricted air flow requirements (per ASTM E-283)
- Shallow for Non-IC Application

Specifications

Voltage	120/277V
Dimmable	0-10V/Triac/ELV
Lamp Type	LED

Dimensions

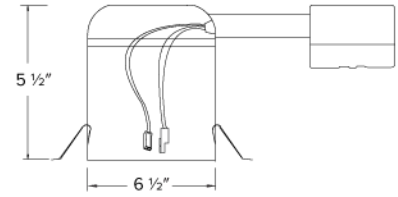

Product Number

Item	Lamp type	Voltage	Dimming
EL760RICDXA	LED	120/277V	0-10V/Triac/ELV

Compatible Products



For use with Dedicated 6" IC LED Housings

6" Ply™ 0-10V Dimmable, 120/277V LED Inserts



Round Insert

EL695

Finishes:

(DW, DHW, DCW)

PRODUCT NUMBER BUILDER

6" 120/277V LED Inserts	Color Temperature	Finish
EL695		
	30 3000K (1350 lm) 35 3500K (1425 lm) 40 4000K (1500 lm)	DW All White DHW Haze w/White Ring DCW Chrome w/White Ring

6" Ply™ 0-10V Dimmable, 120/277V Adjustable LED Inserts



Round Adjustable Pull Down

EL697

Finishes:

(DXW, DXB, DXBZ, DXN)

ACCESSORIES



Interchangeable Lens
(For EL697 Series only)

EP710C 20° Beam
EP712C 60° Beam


PRODUCT NUMBER BUILDER

6" 120/277V Adjustable LED Inserts	Style	Color Temperature	Finish
EL6			
	97 Round Adjustable	27D 2700K (850 lm) 30D 3000K (900 lm)	DXW All White DXB All Black DXBZ All Bronze DXBN All Nickel

Compatible Products

For use with Dedicated 6" 0-10V Koto ICAD LED Housings

0-10V Koto™ LED Module



**0-10V Koto™
LED Module
ELK10DX**

PRODUCT NUMBER BUILDER				
0-10V Koto™ LED Module	Lumens	Voltage	Color Temperature	Beam Angle
ELK				
	10 1000 lm	DX 120/277V	27 2700K	(blank) 38° lens (Standard)
			30 3000K	-S 18° lens
			35 3500K	-N 25° lens
			40 4000K	-W 60° lens
			SD Sunset Dimming	

ACCESSORIES



Lens

- EP731C** 18° Lens
 - EP732C** 25° Lens
 - EP733C** 38° Lens
 - EP734C** 60° Lens
- *EP732C, EP733C, EP734C Included



Snoot

- L50W** White
- L50B** Black



Secondary Optics

- L45** Hex Louver
- L46** Linear Lens
- L47** Spread Louver
- L49** Frosted Lens
- L51** Color Shifter


6" Twist-On Trims



Round Deep Reflector

ELK6418


Finishes:
(W, BB, BZ, H)



Round Reflector

ELK610

Finishes:
(WW, BB, BZBZ, BW, CC, CW, CN, HW)



Adj. Round Reflector

ELK629


Finishes:
(WW, BB, BZBZ, BW, CW, HW)



Adj. Round Baffle

ELK693

Finishes:
(WW, BB, BZBZ, BW)



Adj. Slot Aperture

ELK6420

Finishes:
(W)


6" Unique™ Twist-On Trims



Round Reflector

ELK6710

Finishes:
(W, B, BZ)



Round Baffle

ELK6713

Finishes:
(W, BZ)




Round Wall Wash

ELK6715

Finishes:
(W, BZ)

6" Accessories



Emergency Battery Backup

CAT NO. SPECIFICATIONS

KEM-LD5 8W, 120/277V

* Requires access from above



Fire Cover

CAT NO. SPECIFICATIONS

FIRECVR 9 3/4" H x 17" O.D.




Fire Enclosure

CAT NO. SPECIFICATIONS

FIREENCL 20 3/8" L x 14 3/8" W

FIREENCL-S Shallow, 16" L x 14 3/8" W



Mica Fire Tape

CAT NO. SPECIFICATIONS

FIRETAPE 3/4" W x 16' L