


6" Compact Fluorescent Vertical IC Downlight

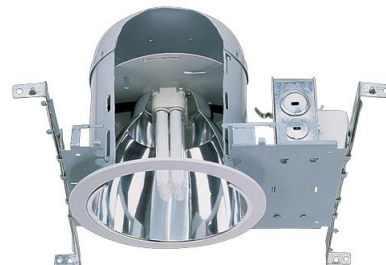

Features

- Compact Fluorescent Single Walled Housing for (1) vertical mounted lamp with integral NPF electronic ballast.
- IC Housing adjusts 1 3/8" to accommodate different ceiling thicknesses.
- Airtight with lensed trims.
- Supplied with captive hanger bars for 24" joist spacing and can be positioned 90°.
- Feed thru listed housing with thermal protector.
- 7 1/2" ht allows use in 2x8 construction.
- cUL Listed for damp location.

Specifications


Wattage 13W - 26W

Voltage 120V

Lamp Type CFL

Damp Location Listed

Dimensions

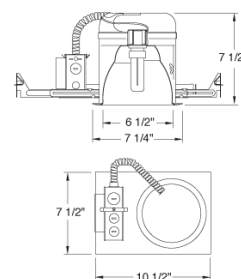

Product Numbers

Item	Lamp type	Watts	Voltage
EL27HE13ICA	CFL	13W	120V
EL27HE26ICA	CFL	26W	120V