

# 8" CFL Vertical Downlight with Plaster Frame




## Features

- 8" Vertical Architectural CFL Downlight.
- Energy efficient.
- Single wall construction.
- Integral thermal protector guards against improper lamping.
- Includes 24" captive bar hangers and plaster frame.
- Captive bar hangers span 24" joists and can be repositioned 90°.
- Pre-wired junction box provided with 1/2" and 3/4" knockouts.
- Maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out).
- Junction box provided with removable access plates.
- Housing adjusts 3/4" to accommodate various ceiling thickness.
- cUL Listed for damp location and for feed through.

## Specifications

|                      |          |
|----------------------|----------|
| <b>Wattage</b>       | 42W      |
| <b>Voltage</b>       | 120/277V |
| <b>Lamp Type</b>     | CFL      |
| <b>Damp Location</b> | Listed   |

## Dimensions

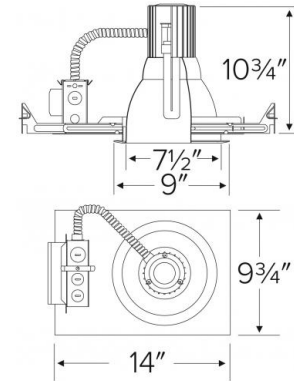

## Product Numbers

| Item     | Description                                  | Lamp type | Watts | Voltage  |
|----------|--|-----------|-------|----------|
| ELVF842E | 8" CFL Vertical Downlight with Plaster Frame | CFL       | 42W   | 120/277V |