


# 8" Square Sky Panel™

Edge-Lit Technology with glare control lens for even glow

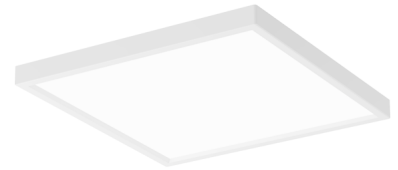

## Features

- Fits 3 1/2" and 4" Octagon and Round Junction boxes
- Fits 4" and 6" Housings with optional mounting accessories
- Dimmable to 10% with select dimmers
- Edge-lit LED technology with glare control lens
- IC Rated and Wet Location Rated
- ETL Listed
- JA8 2016 E-Compliant

## Specifications

<b>Wattage</b>	18W
<b>Lumens</b>	1200 lm - 1300 lm
<b>Voltage</b>	120V
<b>Color Temp.</b>	3000K - 4000K
<b>Dimmable</b>	Triac/ELV
<b>Lamp Type</b>	LED

## Options




White



Black

## Dimensions



## Product Numbers

Item	Lamp type	Lumens	CCT	Watts	Voltage	Dimming	Finish
<b>ELSP8830W</b>	LED	1200 lm	3000K	18W	120V	Triac/ELV	All White
<b>ELSP8830B</b>	LED	1200 lm	3000K	18W	120V	Triac/ELV	All Black
<b>ELSP8840W</b>	LED	1300 lm	4000K	18W	120V	Triac/ELV	All White
<b>ELSP8840B</b>	LED	1300 lm	4000K	18W	120V	Triac/ELV	All Black

# Product Number Builder Example: ELSP8830W

8" Square Sky Panel™

CCT

Finish

**ELSP88**

**30** 3000K  
**40** 4000K


**W** All White  
**B** All Black

## 8" Square Sky Panel

Multiplier: 3000K (x 0.92)

### PHOTOMETRIC REPORT

Product #: ELSP8840  
Wattage/Lumens: 19.5W/ 1175 lm  
Luminaire LPW: 60Lm/W



### CANDLE POWER SUMMARY

Degrees Vertical	0°
0	419
5	412
15	399
25	365
35	321
45	268
55	202
65	135
75	67
85	0
90	0

### ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	26.2	11.7'
6'	11.6	17.5'
8'	6.54	23.4'
10'	4.19	29.2'

### ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30°	323.71	27.60
0-40°	530.87	45.20
0-60°	938.11	79.90
0-90°	1174.71	100.00