

Project name:

Fixture type:

Date:

Birch[™] 4" Square Reflector Trim

The sleek and clean looking Birch[™] System Trims will blend seamlessly into your commercial space. The trims offer a light source aperture of 2 5/8" and a deep reflector that delivers smooth and abundant light distribution with minimal glare.



Features

- Self-flanged spun aluminum reflector
- Twist-On system for easy installation to $\mathsf{Birch}^{\scriptscriptstyle\mathsf{TM}}$ Modules
- Spring loaded mounting clips to hold them tightly into the ceiling

Technical Details

Installation: Easy to install with Twist-On mechanish to any of out Birch System modules. Spring loaded mounting clips will hold the trim thightly into the ceiling.

Warranty: ELCO Products are built to last. 5-year Limited warranty.







All White


All Haze(semispecular)

Haze/White Ring




All Black

Dimensions



Product Numbers

Item	Finish	
ELB440W	All White	
ELB440H	All Haze (Semi-Specular)	
ELB440HW	Haze with White Ring	
ELB440BB	All Black	

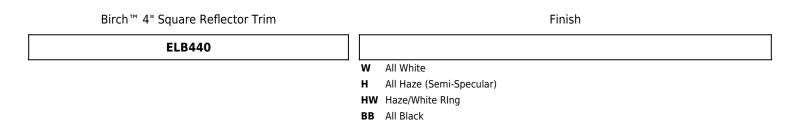

Compatible Products



For use with 4" Birch Square Trim

Birch[™] LED Modules

	CAT NO.	COLOR TEMPERATURE	SPECIFICATIONS			
	ELB15RCT5ICA	5-CCT Switch 2700K, 3000K, 3500K, 4000K, 5000K	 IC Rated, for use in IC and Non-IC applications 750 Im / 1000 Im / 1500 Im (10W / 12W / 20W) Beam Angle adjustment from 25°-45° 120/277V input with 0-10V dimming 			
	Birch [™] High Lume	Birch [™] High Lumen LED Module (1250 lm - 3000 lm) (LUMER) Switch)				
AT 1 -	CAT NO.	COLOR TEMPERATURE	SPECIFICATIONS			
	ELB30R30	3000K	Non-IC, for use in Non-IC applications			
	ELB30R35	3500K	 1250 lm / 2000 lm / 3000 lm (13W / 20W / 35W) Beam Angle adjustment from 22°-50° 			
	ELB30R40	4000K	120/277V input with 0-10V dimming			
Birch.	Square Fram	es				
C. F. C.						
	chitectural Frame onstruction		4" Square Plaster Frame New Construction			
T NO.	SPECIFICATIONS		CAT NO. SPECIFICATIONS			
B44SQEH	Architectural Frame		ELB44SQPF Plaster Frame			
B44SQEH-EM5	Emergency Backup		ELB44SQPF-EM5 Emergency Backup			
anger Bars or <mark>Birch</mark> ™	27″ <mark>Flat Hanger B</mark> for Wood Construc	De-	26" C-Channel Hanger Bars for T-Bar Ceilings			
			CAT NO. SPECIFICATIONS			
chitectural	CAT NO. SPECIFIC	ATIONS	CALINO. SPECIFICATIONS			

Remodel & Retrofit Birch[™] Applications

Remodel/Retrofit				Retrofit	
CAT NO.	SPECIFICATIONS		CAT NO.	SPECIFICATIONS	
ELBRMD	Remodel	ALL AND A DECEMPTION OF A DECE	ELBRT	Retrofit	NUMBER OF STREET, STRE
ELBRMD-EM5	Emergency Backup	-			