

# LED Becket™ Glass Pendants



## Features

- LED Becket™ Glass Pendant.
- Includes Nickel Flat Canopy with Driver.
- 6 ½ ft. metal finish cable.
- ETL Listed.

## Specifications

|                      |        |
|----------------------|--------|
| <b>Wattage</b>       | 5W     |
| <b>Lumens</b>        | 300 lm |
| <b>Voltage</b>       | 120V   |
| <b>Color Temp.</b>   | 3000K  |
| <b>Lamp Type</b>     | LED    |
| <b>Damp Location</b> | Listed |

## Options




Athena



Autumn

## Dimensions

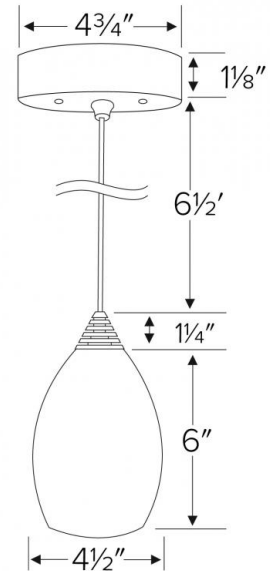

## Product Numbers

| Item      | Lamp type | Lumens | CCT   | Watts | Voltage | Finish |
|-----------|-----------|--------|-------|-------|---------|--------|
| EDL62N-AT | LED       | 300 lm | 3000K | 5W    | 120V    | Athena |

| Item             | Lamp type | Lumens | CCT   | Watts | Voltage | Finish |
|------------------|-----------|--------|-------|-------|---------|--------|
| <b>EDL62N-AU</b> | LED       | 300 lm | 3000K | 5W    | 120V    | Autumn |



# Dimmer Compatibility Chart Pendants

## ELCO Lighting

### For Reference Only

Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

| Manufacturer | Product   | Part Number | Dimmed Light Output Range |
|--------------|---|-------------|---------------------------|
| Lutron       | Ariadni®/Toggler® C-L Single Pole/3-Way Dimmer                | AYCL-153P   | 10% - 100%                |
|              | Ariadni®/Toggler® C-L Single Pole/3-Way Dimmer                | AYCL-233P   | 10% - 100%                |
|              | Skylark Contour® C-L, Single Pole/3-Way Dimmer                | CTCL-153P   | 10% - 100%                |
|              | Diva® (gloss) C-L Single Pole/3-Way Dimmer                    | DVCL-153P   | 5% - 86%                  |
|              | Diva® (gloss) C-L Single Pole/3-Way Dimmer                    | DVCL-253P   | 5% - 86%                  |
|              | Diva® (gloss) Single Pole, Electronic Low Voltage Dimmer      | DVELV-300P  | 10% - 100%                |
|              | Diva® (gloss) 3-Way, Magnetic Low Voltage Dimmer              | DVLV-603P   | 10% - 100%                |
|              | Diva® (satin) C-L Single Pole/3-Way Dimmer                    | DVSCCL-153P | 10% - 100%                |
|              | Diva® (satin) C-L Single Pole/3-Way Dimmer                    | DVSCCL-253P | 10% - 100%                |
|              | Grafik® T C-L, Single Pole Dimmer                             | GT-150      | 10% - 100%                |
|              | Grafick® T Wireless C-L, Single Pole or Multi-Location Dimmer | GTJ-250M    | 5% - 80%                  |
|              | Skylark® C-L Single Pole/3-Way Dimmer                         | SCL-153P    | 10% - 100%                |
|              | Skylark® Single Pole, Electronic Low Voltage, Preset Dimmer   | SELV-300P   | 10% - 100%                |
|              | Ariadni®/Toggler® Series 150W Single Pole/3-Way Dimmer        | TGCL-153P   | 5% - 86%                  |

\*NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.