

# LED Blake™ Glass Pendants



## Features

- LED Blake™ Glass Pendant.
- Includes Nickel Flat Canopy with Driver.
- 6 ½ ft. metal finish cable.

## Specifications

Wattage	5W
Lumens	300 lm
Voltage	120V
Color Temp.	3000K
Lamp Type	LED
Damp Location	Listed

## Options



Mars



Athena




Autumn



Frost

## Dimensions

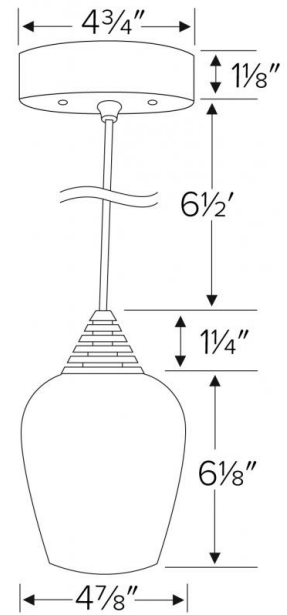

## Product Numbers

Item	Lamp type	Lumens	CCT	Watts	Voltage	Finish
<b>EDL61N-MA</b>	LED	300 lm	3000K	5W	120V	Mars
<b>EDL61N-AT</b>	LED	300 lm	3000K	5W	120V	Athena
<b>EDL61N-AU</b>	LED	300 lm	3000K	5W	120V	Autumn
<b>EDL61N-FR</b>	LED	300 lm	3000K	5W	120V	Frost



# Dimmer Compatibility Chart

## Pendants

### ELCO Lighting

#### For Reference Only

Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

Manufacturer	Product	Part Number	Dimmed Light Output Range
Lutron	Ariadni®/Toggler® C-L Single Pole/3-Way Dimmer	AYCL-153P	10% - 100%
	Ariadni®/Toggler® C-L Single Pole/3-Way Dimmer	AYCL-233P	10% - 100%
	Skylark Contour® C-L, Single Pole/3-Way Dimmer	CTCL-153P	10% - 100%
	Diva® (gloss) C-L Single Pole/3-Way Dimmer	DVCL-153P	5% - 86%
	Diva® (gloss) C-L Single Pole/3-Way Dimmer	DVCL-253P	5% - 86%
	Diva® (gloss) Single Pole, Electronic Low Voltage Dimmer	DVELV-300P	10% - 100%
	Diva® (gloss) 3-Way, Magnetic Low Voltage Dimmer	DVLV-603P	10% - 100%
	Diva® (satin) C-L Single Pole/3-Way Dimmer	DVSCCL-153P	10% - 100%
	Diva® (satin) C-L Single Pole/3-Way Dimmer	DVSCCL-253P	10% - 100%
	Grafik® T C-L, Single Pole Dimmer	GT-150	10% - 100%
	Grafick® T Wireless C-L, Single Pole or Multi-Location Dimmer	GTJ-250M	5% - 80%
	Skylark® C-L Single Pole/3-Way Dimmer	SCL-153P	10% - 100%
	Skylark® Single Pole, Electronic Low Voltage, Preset Dimmer	SELV-300P	10% - 100%
	Ariadni®/Toggler® Series 150W Single Pole/3-Way Dimmer	TGCL-153P	5% - 86%

\*NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.