

# LED Diecast Aluminum Pendant



## Features

- 2" x 8" Pendant.
- Diecast aluminum housing.
- Standard 38° lens included, EP719C - 15°, EP720 - 25° available.
- Dimmable.
- Canopy included.
- 3/8" OD steel stem (sold separately).
- Snoot & Louver available (sold separately).

## Specifications

|                    |                 |
|--------------------|-----------------|
| <b>Wattage</b>     | 10W             |
| <b>Lumens</b>      | 700 lm - 750 lm |
| <b>Voltage</b>     | 120V            |
| <b>Color Temp.</b> | 3000K - 4000K   |
| <b>Dimmable</b>    | Triac           |
| <b>Lamp Type</b>   | LED             |

## Options



White



Black




Optional Snoot

**Beam Angle** 38°  
**Damp Location** Listed



**Optional Louver**

**Dimensions**

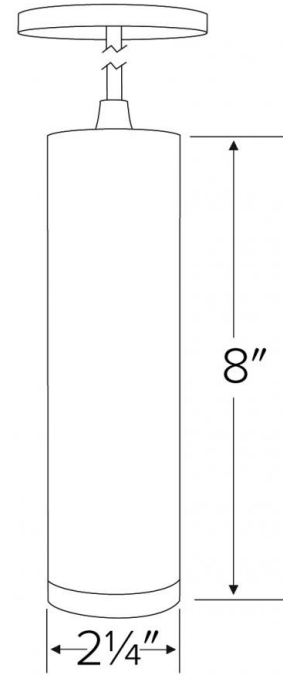

**Product Numbers**

| Item            | Description     | Lamp type | Lumens | CCT   | Watts | Voltage | Dimming | Beam Angle | Finish    |
|-----------------|-----------------|-----------|--------|-------|-------|---------|---------|------------|-----------|
| <b>EDL8030W</b> |                 | LED       | 700 lm | 3000K | 10W   | 120V    | Triac   | 38°        | All White |
| <b>EDL8030B</b> |                 | LED       | 700 lm | 3000K | 10W   | 120V    | Triac   | 38°        | All Black |
| <b>EDL8040W</b> |                 | LED       | 750 lm | 4000K | 10W   | 120V    | Triac   | 38°        | All White |
| <b>EDL8040B</b> |                 | LED       | 750 lm | 4000K | 10W   | 120V    | Triac   | 38°        | All Black |
| <b>EP310B</b>   | Optional Snoot  |           |        |       |       |         |         |            | All Black |
| <b>EP325B</b>   | Optional Louver |           |        |       |       |         |         |            | All Black |

**Product Number Builder** Example: **EDL8030W**

ELCO 2" x 8" Pendant

Size

Color Temp

Finish

**EDL**

**80** 2 x 8

**30** 3000K  
**40** 4000K

**W** All White  
**B** All Black



# Dimmer Compatibility Chart LED Diecast Aluminum Pendants

## ELCO Lighting

### For Reference Only

Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

| Manufacturer | Product   | Part Number | Dimmed Light Output Range |
|--------------|---|-------------|---------------------------|
| Lutron       | Ariadni®/Toggler® C-L Single Pole/3-Way Dimmer                | AYCL-153P   | 10% - 100%                |
|              | Ariadni®/Toggler® C-L Single Pole/3-Way Dimmer                | AYCL-233P   | 10% - 100%                |
|              | Skylark Contour® C-L, Single Pole/3-Way Dimmer                | CTCL-153P   | 10% - 100%                |
|              | Diva® (gloss) C-L Single Pole/3-Way Dimmer                    | DVCL-153P   | 5% - 86%                  |
|              | Diva® (gloss) C-L Single Pole/3-Way Dimmer                    | DVCL-253P   | 5% - 86%                  |
|              | Diva® (gloss) Single Pole, Electronic Low Voltage Dimmer      | DVELV-300P  | 10% - 100%                |
|              | Diva® (gloss) 3-Way, Magnetic Low Voltage Dimmer              | DVLV-603P   | 10% - 100%                |
|              | Diva® (satin) C-L Single Pole/3-Way Dimmer                    | DVSCCL-153P | 10% - 100%                |
|              | Diva® (satin) C-L Single Pole/3-Way Dimmer                    | DVSCCL-253P | 10% - 100%                |
|              | Grafik® T C-L, Single Pole Dimmer                             | GT-150      | 10% - 100%                |
|              | Grafick® T Wireless C-L, Single Pole or Multi-Location Dimmer | GTJ-250M    | 5% - 80%                  |
|              | Skylark® C-L Single Pole/3-Way Dimmer                         | SCL-153P    | 10% - 100%                |
|              | Skylark® Single Pole, Electronic Low Voltage, Preset Dimmer   | SELV-300P   | 10% - 100%                |
|              | Ariadni®/Toggler® Series 150W Single Pole/3-Way Dimmer        | TGCL-153P   | 5% - 86%                  |

\*NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.