

Project name:	
Fixture type:	
Date:	

LED Diecast Aluminum Pendant



Features

- 2" x 8" Pendant.
- Diecast aluminum housing.
- Standard 38° lens included, EP719C 15°, EP720 25° available.
- Dimmable.
- Canopy included.
- 3/8" OD steel stem (sold separately).
- Snoot & Louver available (sold separately).


Specifications

Damp Location Listed





Dimensions

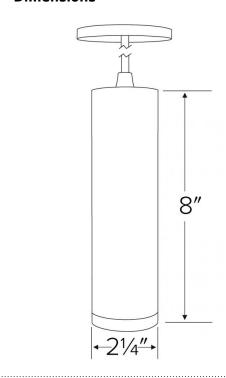

Product Number

Item	Description	Finish
EP325B	Optional Louver	All Black

Product Number Builder Example: EDL8030W

ELCO 2" x 8" Pendant	Size	Color Temp	Finish
EDL			
	80 2 x 8	30 3000K	W All White
		40 4000K	B All Black



Dimmer Compatibility Chart LED Diecast Aluminum Pendants

For Reference Only

Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

Manufacturer	Product	Part Number	Dimmed Light Output Range
	Ariadni®/Toggler® C·L Single Pole/3-Way Dimmer	AYCL-153P	10% - 100%
	Ariadni®/Toggler® C·L Single Pole/3-Way Dimmer	AYCL-233P	10% - 100%
	Skylark Contour® C-L, Single Pole/3-Way Dimmer	CTCL-153P	10% - 100%
	Diva® (gloss) C⋅L Single Pole/3-Way Dimmer	DVCL-153P	5% - 86%
	Diva® (gloss) C⋅L Single Pole/3-Way Dimmer	DVCL-253P	5% - 86%
	Diva® (gloss) Single Pole, Electronic Low Voltage Dimmer	DVELV-300P	10% - 100%
Lutron	Diva® (gloss) 3-Way, Magnetic Low Voltage Dimmer	DVLV-603P	10% - 100%
Lutron	Diva® (satin) C⋅L Single Pole/3-Way Dimmer	DVSCCL-153P	10% - 100%
	Diva® (satin) C⋅L Single Pole/3-Way Dimmer	DVSCCL-253P	10% - 100%
	Grafik® T C⋅L, Single Pole Dimmer	GT-150	10% - 100%
	Grafick® T Wireless C·L, Single Pole or Multi-Location Dimmer	GTJ-250M	5% - 80%
	Skylark® C·L Single Pole/3-Way Dimmer	SCL-153P	10% - 100%
	Skylark® Single Pole, Electronic Low Voltage, Preset Dimmer	SELV-300P	10% - 100%
	Ariadni®/Toggler® Series 150W Single Pole/3-Way Dimmer	TGCL-153P	5% - 86%

^{*}NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.