

# LED Diecast Aluminum Pendant



## Features

- 3" x 8" Pendant.
- Diecast aluminum housing.
- Standard 38° lens included, EP722C - 15°, EP723C - 25° available.
- Dimmable.
- Canopy included.
- 3/8" OD steel stem (sold separately).
- Snoot available (sold separately).

## Specifications

<b>Wattage</b>	18W
<b>Lumens</b>	1490 lm - 1610 lm
<b>Voltage</b>	120V
<b>Color Temp.</b>	3000K - 4000K
<b>Dimmable</b>	Triac
<b>Lamp Type</b>	LED
<b>Beam Angle</b>	38°
<b>Damp Location</b>	Listed

## Options



White




Black



Optional Snoot

## Dimensions

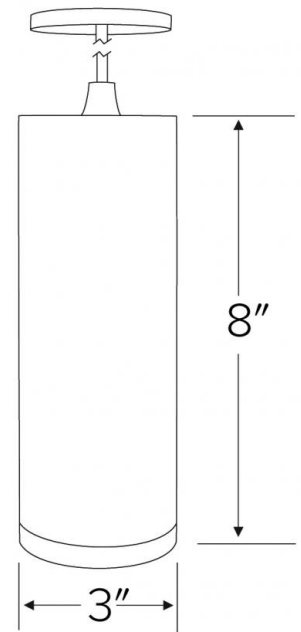

### Product Numbers

Item	Description	Lamp type	Lumens	CCT	Watts	Voltage	Dimming	Beam Angle	Finish
<b>EDL8130W</b>		LED	1490 lm	3000K	18W	120V	Triac	38°	All White
<b>EDL8130B</b>		LED	1490 lm	3000K	18W	120V	Triac	38°	All Black
<b>EDL8140W</b>		LED	1610 lm	4000K	18W	120V	Triac	38°	All White
<b>EDL81CT3W</b>		LED	1490 lm	3000K, 3500K, 4000K	18W	120V	Triac	38°	All White
<b>EP311B</b>	Optional Snoot								All Black

## Product Number Builder Example: EDL8130W

ELCO 3" x 8" Pendant

Size

Color Temp

Finish

**EDL**

**81** 3 x 8

**30** 3000K  
**40** 4000K  
**CT3** 3000K, 3500K, 4000K

**W** All White  
**B** All Black



# Dimmer Compatibility Chart

## LED Diecast Aluminum Pendants

**ELCO Lighting**

### For Reference Only

Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

Manufacturer	Product	Part Number	Dimmed Light Output Range
Lutron	Ariadni®/Toggler® C-L Single Pole/3-Way Dimmer	AYCL-153P	10% - 100%
	Ariadni®/Toggler® C-L Single Pole/3-Way Dimmer	AYCL-233P	10% - 100%
	Skylark Contour® C-L, Single Pole/3-Way Dimmer	CTCL-153P	10% - 100%
	Diva® (gloss) C-L Single Pole/3-Way Dimmer	DVCL-153P	5% - 86%
	Diva® (gloss) C-L Single Pole/3-Way Dimmer	DVCL-253P	5% - 86%
	Diva® (gloss) Single Pole, Electronic Low Voltage Dimmer	DVELV-300P	10% - 100%
	Diva® (gloss) 3-Way, Magnetic Low Voltage Dimmer	DVLV-603P	10% - 100%
	Diva® (satin) C-L Single Pole/3-Way Dimmer	DVSCCL-153P	10% - 100%
	Diva® (satin) C-L Single Pole/3-Way Dimmer	DVSCCL-253P	10% - 100%
	Grafik® T C-L, Single Pole Dimmer	GT-150	10% - 100%
	Grafick® T Wireless C-L, Single Pole or Multi-Location Dimmer	GTJ-250M	5% - 80%
	Skylark® C-L Single Pole/3-Way Dimmer	SCL-153P	10% - 100%
	Skylark® Single Pole, Electronic Low Voltage, Preset Dimmer	SELV-300P	10% - 100%
	Ariadni®/Toggler® Series 150W Single Pole/3-Way Dimmer	TGCL-153P	5% - 86%

\*NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.