

LED Diecast Aluminum Pendant



Features

- 3" x 8" Pendant.
- Diecast aluminum housing.
- Standard 38° lens included, EP722C - 15°, EP723C - 25° available.
- Dimmable.
- Canopy included.
- 3/8" OD steel stem (sold separately).
- Snoot available (sold separately).

Specifications

| | |
|----------------------|---------------------|
| Wattage | 18W |
| Lumens | 1490 lm |
| Voltage | 120V |
| Color Temp. | 3000K, 3500K, 4000K |
| Dimmable | Triac |
| Lamp Type | LED |
| Beam Angle | 38° |
| Damp Location | Listed |

Options



White




Black



Optional Snoot

Dimensions

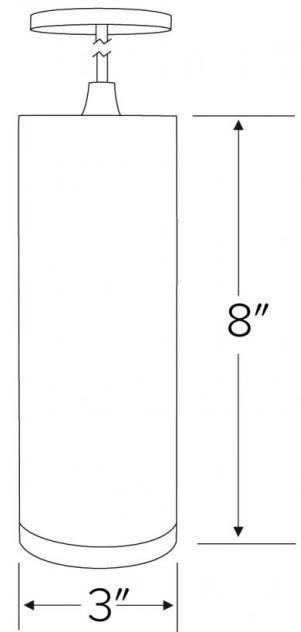

Product Number

| Item | Lamp type | Lumens | CCT | Watts | Voltage | Dimming | Beam Angle | Finish |
|------------------|-----------|---------|---------------------------|-------|---------|---------|------------|-----------|
| EDL81CT3W | LED | 1490 lm | 3000K, 3500K, 4000K | 18W | 120V | Triac | 38° | All White |

Product Number Builder Example: EDL8130W

ELCO 3" x 8" Pendant

Size

Color Temp

Finish

EDL

81 3 x 8

30 3000K
40 4000K
CT3 3000K, 3500K, 4000K

W All White
B All Black



Dimmer Compatibility Chart LED Diecast Aluminum Pendants

ELCO Lighting

For Reference Only

Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

| Manufacturer | Product | Part Number | Dimmed Light Output Range |
|--------------|---|-------------|---------------------------|
| Lutron | Ariadni®/Toggler® C-L Single Pole/3-Way Dimmer | AYCL-153P | 10% - 100% |
| | Ariadni®/Toggler® C-L Single Pole/3-Way Dimmer | AYCL-233P | 10% - 100% |
| | Skylark Contour® C-L, Single Pole/3-Way Dimmer | CTCL-153P | 10% - 100% |
| | Diva® (gloss) C-L Single Pole/3-Way Dimmer | DVCL-153P | 5% - 86% |
| | Diva® (gloss) C-L Single Pole/3-Way Dimmer | DVCL-253P | 5% - 86% |
| | Diva® (gloss) Single Pole, Electronic Low Voltage Dimmer | DVELV-300P | 10% - 100% |
| | Diva® (gloss) 3-Way, Magnetic Low Voltage Dimmer | DVLV-603P | 10% - 100% |
| | Diva® (satin) C-L Single Pole/3-Way Dimmer | DVSCCL-153P | 10% - 100% |
| | Diva® (satin) C-L Single Pole/3-Way Dimmer | DVSCCL-253P | 10% - 100% |
| | Grafik® T C-L, Single Pole Dimmer | GT-150 | 10% - 100% |
| | Grafick® T Wireless C-L, Single Pole or Multi-Location Dimmer | GTJ-250M | 5% - 80% |
| | Skylark® C-L Single Pole/3-Way Dimmer | SCL-153P | 10% - 100% |
| | Skylark® Single Pole, Electronic Low Voltage, Preset Dimmer | SELV-300P | 10% - 100% |
| | Ariadni®/Toggler® Series 150W Single Pole/3-Way Dimmer | TGCL-153P | 5% - 86% |

*NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.