

# Medium LED Floodlight

Medium LED floodlights are ideal for illuminating building facades, wall washing building exteriors, sign lighting, landscape lighting, and improving building security. Heavy-duty die-cast aluminum construction and high quality components ensure ELCO floodlights will provide years of solid performance in almost any weather condition. Available in medium and wide beam angles.



## Features


- Die-cast Aluminum Housing.
- Durable dark bronze coat finish.
- Knuckle mount for adjusting angle.
- Standard input wattage: 35W (100W HID equivalent) or 45W (150W HID equivalent).
- Optional Accessories:
  - Knuckle (EFLMKW) enabling mounting on junction boxes and pipes.
  - Wireguard (EFLMWG) for added protection.
  - Photocells, button type (EWPPHBU, EWPPHB1) and swivel type (EWPPHSU).
  - Motion Detectors (EWMSU).

## Specifications

<b>Wattage</b>	45W
<b>Lumens</b>	5400 lm
<b>Voltage</b>	120/277V
<b>Color Temp.</b>	5000K
<b>Lamp Type</b>	LED
<b>Beam Angle</b>	Medium Flood
<b>CRI</b>	70+
<b>Power Factor</b>	> 0.9
<b>Wet Location</b>	Listed

## Options

### Dimensions

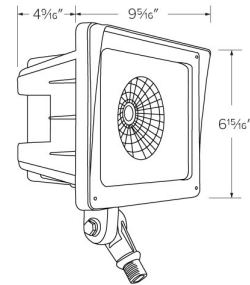

## Technical Details

**Lamp:** COB LED, CRI 70+

**Optics:** Glass lens

**Construction:** Die-cast aluminum housing. Dark bronze powder coated finish. Impact, corrosion, and UV resistant.

**Electrical:** Constant current 120/277V AC Class 2 Driver with a power factor > 0.9. Ambient operating temperature: -40°F (-40°C) to 113°F (45°C). Standard input wattage: 35W (100W HID equivalent) or 45W (150W HID equivalent)

**Listings:** cUL listed for wet locations. LM-80 certified. IP65 rated.

**Warranty:** ELCO Lighting warrants products will be free from defects in materials and workmanship for a period of 5 years.

## Product Number

Item	Lamp type	Lumens	CCT	Watts	Voltage	Beam Angle	Finish
<b>EFL45M50FL</b>	LED	5400 lm	5000K	45W	120/277V	Medium Flood	Dark Bronze

# Product Number Builder Example: EFL35M40FL

Medium Floodlight

Wattage

Size

Color Temp

Beam Spread

**EFL**

**35** 35W  
**45** 45W

**M** Medium

**40** 4000K  
**50** 5000K


**FL** Medium Flood  
**WF** Wide Flood

## Medium LED Floodlight

Multiplier: 5000K (x 1.04)

### PHOTOMETRIC REPORT

Product #: EFL35M40FL  
Wattage/Lumens: 35.7W/ 3533 Lm  
Luminaire LPW: 99 Lm/W

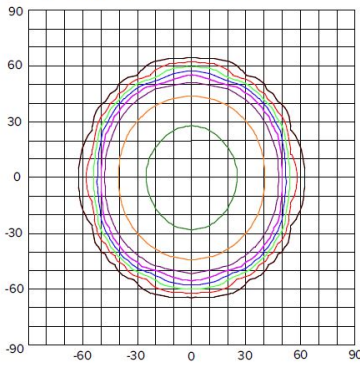

### FOOTCANDLE LEGEND:

- 10% = 145.5
- 20% = 291
- 30% = 436.5
- 40% = 582
- 50% = 727.5
- 60% = 873
- 75% = 1091.25
- 90% = 1309.5

### ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	90.7	11.6'
6'	40.3	17.3'
8'	22.7	23.1'
10'	14.5	28.9'

### ZONAL LUMEN SUMMARY


Zone	Lumens	% Luminaire
0-30°	1152.93	32.60
0-40°	1928.72	54.60
0-60°	3345.21	94.70
0-90°	3529.57	99.90

## Medium LED Floodlight

Multiplier: 5000K (x 1.04)

### PHOTOMETRIC REPORT

Product #: EFL45M40FL  
Wattage/Lumens: 47.9W/ 5451 Lm  
Luminaire LPW: 114 Lm/W

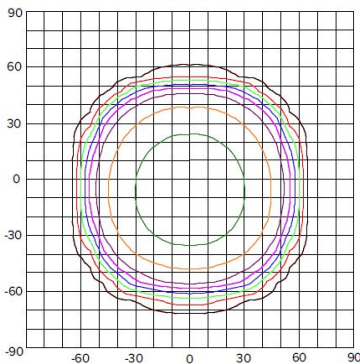

### FOOTCANDLE LEGEND:

- 10% = 225.34
- 20% = 450.68
- 30% = 676.02
- 40% = 901.36
- 50% = 1126.7
- 60% = 1352.04
- 75% = 1690.05
- 90% = 2028.06

### ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	140	11.2'
6'	62.3	16.9'
8'	35.0	22.5'
10'	22.4	28.1'

### ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30°	1792.58	32.90
0-40°	2993.63	54.90
0-60°	5098.71	93.50
0-90°	5446.00	99.90