


Mini Photocell LED Step Light with Frosted Acrylic Lens

ELCO's Moa Collection consists of damp or wet location standard and mini LED Step Lights with or without a photocell which are offered in 3000K, 120V or 12V AC with an Angled Louver or acrylic lens in a sharp White, Black, Nickel or Bronze powder coated finish.

Vertical or Horizontal

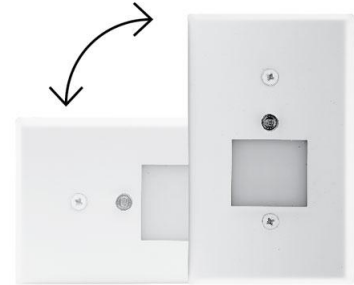

Features

- Energy saving photocell automatically turns unit on in the dark.
- Vertical or Horizontal Mounting.
- Galvanized stamped steel housing.
- Powder coated faceplate.
- Integrated LED board and driver.
- Mounts in a standard single gang box.
- Life span of 35,000 hours L70.

Specifications

Wattage	0.8W
Lumens	50 lm
Voltage	120V
Color Temp.	3000K
Lamp Type	LED
CRI	90+
Wet Location	Listed

Options



Nickel



Black



White



Bronze

Technical Details

Optics: Acrylic lens diffuses light illuminate walkway.

Construction: Stamped galvanized steel housing with smooth powder coat finish faceplate. LED Box with bracket for installation. Phillip screws hold faceplate to box.

Installation: Easily installs into a standard single gang switch box. Includes installation hardware and bracket.

Electrical:



- Ambient operating temperature -23°F (-5°C) to 113°F (45°C).
- 120V ELST69: Driver input of 120V 50/60Hz connects directly to line voltage power.

LED Technology:

- 90+ CRI for extremely accurate color rendering.
- Lumen Maintenance of 35,000 hours L70 Life.
- 12 LED array.

Listings: UL and cULus Listed for Wet Location.

Dimensions



Product Numbers

Item	Lamp type	Lumens	CCT	Watts	Voltage	Finish
ELST69B	LED	50 lm	3000K	0.8W	120V	All Black
ELST69BZ	LED	50 lm	3000K	0.8W	120V	All Bronze
ELST69N	LED	50 lm	3000K	0.8W	120V	Nickel
ELST69W	LED	50 lm	3000K	0.8W	120V	All White