


# Oak™ Housings with 12V AC Transformer

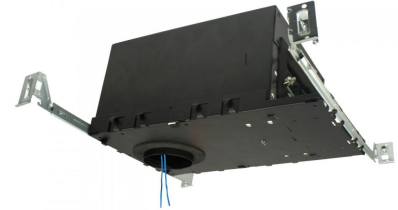


## Features

- R60 Insulation housing, IC Airtight
- Includes individual electronic transformer
- 2" cutout for downlight (E1L02, E1L12 and E11F)
- 2 3/8" cutout for adjustable (E1L32 & E2L22)
- 2 1/2" cutout for trimless (EL01SFR + E1L61)
- Suitable for Chicago Plenum construction


## Specifications

<b>Voltage</b>	120V or 277V
<b>Dimmable</b>	ELV, 0-10V


### E1LF1



### E1LF2



### E1LF3TL



## Product Numbers

Item	Description	Voltage	Dimming
<b>E1LF1ICAJ</b>	For Oak Downlight	120V	ELV
<b>E1LF1ICAJ-7</b>	For Oak Downlight	277V	
<b>E1LF1ICAJDX</b>	For Oak Downlight	120V	0-10V
<b>E1LF1ICAJDX-7</b>	For Oak Downlight	277V	0-10V
<b>E1LF2ICAJ</b>	For Oak Adjustable	120V	ELV
<b>E1LF2ICAJ-7</b>	For Oak Adjustable	277V	
<b>E1LF2ICAJDX</b>	For Oak Adjustable	120V	0-10V
<b>E1LF2ICAJDX-7</b>	For Oak Adjustable	277V	0-10V
<b>E1LF3TLICAJ</b>	For Oak Trimless	120V	ELV
<b>E1LF3TLICAJ-7</b>	For Oak Trimless	277V	
<b>E1LF3TLICAJDX</b>	For Oak Trimless	120V	0-10V
<b>E1LF3TLICAJDX-7</b>	For Oak Trimless	277V	0-10V

## Product Number Builder Example: **E1LF1ICAJ**

Elco Oak™ Mounting Frame

Cutout

IC Airtight

Dimming

**E1LF**

**1**

- 1** For Oak Downlight
- 2** For Oak Adjustable
- 3TL** For Oak Trimless

**ICAJ** ICA

**120V** Input/ELV Dimmable

- 7** 277V Input
- DX** 120V Input/0-10V Dimmable
- DX-7** 277V Input/0-10V Dimmable

# Compatible Products



For use with 1" Oak™ IC Rated R60 Insulation Housing

## 1" Oak™ Recessed Downlight LED Light Engines - use with E1LF1CAJ Series



**E1L02 Series**  
**Round Downlight**  
Finishes:  
(W, B, BZ, H, BB)



**E1L12 Series**  
**Square Downlight**  
Finishes:  
(W, B, BZ, H, BB)



**E111**  
**Cove Light**  
Finishes:  
(W)

## 1" Oak™ Recessed Adjustable LED Light Engines - use with E1LF2CAJ Series




**E1L32 Series**  
**Round Gimbal**  
Finishes:  
(W, B, BZ)



**E1L22 Series**  
**Square Pull Down**  
Finishes:  
(W, B, BZ)

## 1" Oak™ Recessed Trimless LED Light Engines - use with E1LF3TLCAJ Series



**E1L61 Series**  
**Round Trimless**  
Finishes:  
(W, B, BZ)

### PRODUCT NUMBER BUILDER


Oak™ Light Engine	Style	Beam Angle	Color Temperature	Finish
<b>E1L</b>				
<b>02</b>	Round Downlight	<b>F</b> 38° (Standard)	<b>27</b> 2700K	<b>W</b> All White
<b>12</b>	Square Downlight	<b>NF</b> 28°	<b>30</b> 3000K	<b>B</b> Black
<b>32</b>	Round Gimbal	<b>WF</b> 60°	<b>35</b> 3500K	<b>BZ</b> All Bronze
<b>22</b>	Square Pull Down		<b>40</b> 4000K	<b>H</b> Haze w/White Ring
<b>61</b>	Round Trimless		<b>SD</b> Sunset	<b>BB</b> All Black

# Compatible Products


For use with 1" Oak™ IC Rated R60 Insulation Housing

## 1" Oak™ Accessories

---



Downlight Trims  
For E1L02 & E1L12



Downlight Trims  
For E1L02 & E1L12



Optional Lenses for  
E1L02, E1L12, & E1L32

CAT NO.	SPECIFICATIONS	CAT NO.	SPECIFICATIONS	CAT NO.	SPECIFICATIONS
RM1W	All White	RM11W	All White	EP713C	28°
RM1B	Black w/ White Ring	RM11B	Black w/ White Ring	EP715C	50°
RM1BZ	All Bronze	RM11BZ	All Bronze		
RM1H	Haze w/ White Ring	RM11H	Haze w/ White Ring		
RM1BB	All Black	RM11BB	All Black		