

SAGE LED Undercabinet Lightbar




Features

- 1"H x 1"W
- End to end connector and mounting brackets included
- Linkable up to 40ft.
- Polycarbonate lens
- 120V Dimmable
- ETL Listed
- ENERGY STAR qualified

Specifications

| | |
|--------------------|--|
| Wattage | 5W - 20W |
| Lumens | 300 lm - 1200 lm |
| Voltage | 120V |
| Color Temp. | 2700K, 3000K, 3500K, 4000K, 5000K - 3000K |
| CRI | 90+ |

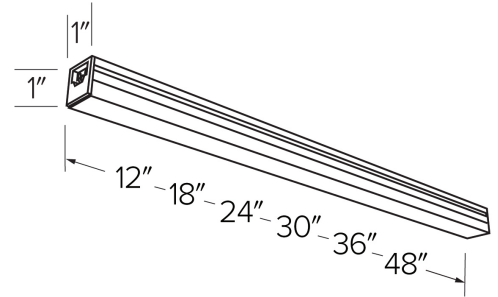

Product Numbers

| Item | Description | Lumens | CCT | Watts | Voltage | Finish |
|------------------|-------------|---------|---|-------|---------|-----------|
| EUD32CT5W | 12" | 300 lm | 2700K, 3000K, 3500K, 4000K, 5000K | 5W | 120V | All White |
| EUD3330W | 18" | 500 lm | 3000K | 8W | 120V | All White |
| EUD34CT5W | 24" | 600 lm | 2700K, 3000K, 3500K, 4000K, 5000K | 10W | 120V | All White |
| EUD3530W | 30" | 720 lm | 3000K | 12W | 120V | All White |
| EUD36CT5W | 36" | 900 lm | 2700K, 3000K, 3500K, 4000K, 5000K | 15W | 120V | All White |
| EUD3730W | 48" | 1200 lm | 3000K | 20W | 120V | All White |

Compatible Products

Sage® LED Undercabinet Light



Accessories



6' Power Cord

| CAT NO. | SPECIFICATIONS |
|---------|----------------|
| EUDCRD | 6' Length |



End-to-End Connector

| CAT NO. | SPECIFICATIONS |
|---------|----------------|
| EUDCS31 | |



6" Linking Cable

| CAT NO. | SPECIFICATIONS |
|---------|----------------|
| EUDC31 | |



Junction Box

| CAT NO. | SPECIFICATIONS |
|---------|----------------|
| EUDJBX | White |



ELCO Lighting

Dimmer Compatibility Chart

Undercabinet

EUD Series

For Reference Only

Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

| Manufacturer | Product | Part Number | Dimmed Light Output Range |
|------------------|--|-------------|---------------------------|
| 120V Only | | | |
| Legrand | CFL/LED Multi-way Paddle Dimmer | HDCL-453 | 10% - 100% |
| Leviton | IllumaTech Single Pole/3-Way Preset Electro-Mechanical Electronic Low Voltage Slide Dimmer | IPE04 | 10% - 100% |
| | Decora SureSlide® Single Pole/3-Way with Present ON/OFF Switch | 6674 | 5% - 90% |
| Lutron | Rotary Dim N Glo 600W 3-Way Dimmer | DNG-603PH | 10% - 100% |
| | DIVA® (Gloss) 450W, Single Pole, Magnetic Low Voltage Dimmer | DVLV-600P | 10% - 100% |
| | DIVA® Series 600W Single Pole Dimmer | DV-600P | 10% - 100% |
| | DIVA® Series 150W Single Pole/3-Way Dimmer | DVCL-153P | 5% - 86% |
| | Maestro® Series 150W Single Pole/3-Way/Multi-Location Dimmer | MACL-153M | 5% - 80% |
| | DIVA® (Gloss) 600W 3-Way Preset Eco-dim Dimmer | DV-603PG | 10% - 100% |

*NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.