


# Unique™ 6" Round Baffle for Koto™ Module

One Piece die-cast trims with Twist-&-Lock system for easy installation

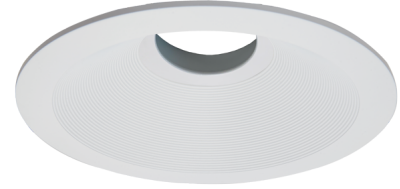

## Features

- Convenient Twist-&-Lock design for ease of installation.
- Diecast construction for lasting quality.
- 7 1/2" O.D. - 2" H

## Technical Details

**Construction:** Diecast aluminum with a powder coated finish.

**Installation:** Twist-lock design allows for easy mounting onto the Koto™ LED Module. Clips securely mount trim into the housing and keeps ring flush with ceiling.

**Compatible Module:** Koto™ LED Modules (ELK07 & ELK09 Series)

**Lamp:** Koto™ LED Module.

## Options



All White



All Bronze

## Product Number

Item	Finish
ELK6713W	All White

## Product Number Builder Example: ELK6713W

Unique™ 6" Round Baffle

Finish

**ELK6713**


W All White  
BZ All Bronze

# Compatible Products



For use with 6" Koto™ Twist-On Trims

## Koto™ LED Module



**Koto™ LED Module**  
ELK07, ELK09, & ELK11

PRODUCT NUMBER BUILDER					
Koto™ LED Module	Lumens	Color Temperature	Beam Angle		
ELK					
07	750 lm	27 2700K	(blank) 38° lens (Standard)		
09	950 lm	30 3000K	-S 18° lens		
11	1150 lm	35 3500K	-N 25° lens		
		40 4000K	-W 60° lens		
		SD Sunset Dimming (For ELK09 & ELK11)	-FC 18° - 50° Adjustable (ELK07 Only)		

### ACCESSORIES




#### Lens

**EP731C** 18° Lens  
**EP732C** 25° Lens  
**EP733C** 38° Lens  
**EP734C** 60° Lens  
\*EP732C, EP733C, EP734C  
 Included with standard module



#### Snoot


**L50W** White  
**L50B** Black



#### Secondary Optics

**L45** Hex Louver  
**L46** Linear Lens  
**L47** Spread Louver  
**L49** Frosted Lens  
**L51** Color Shifter  
**L57** White Hex Louver  
**L52** Blue Lens  
**L53** Pink Shifter

\*Standard module includes 38° installed with 25° & 60° field changeable lenses.




**Koto™ LED Module with 5-CCT Switch**



#### Product Number

**ELK08CT5** 825 lm, 5-CCT, 120V  
**ELK10CT5** 1000 lm, 5-CCT, 120V



**12V AC Retrofit Koto™ LED Module**

For retrofitting 4" Bi-Pin 12V AC GU5.3 Housings

#### Product Number

**ELK0827-12** 800 lm, 2700K, 12V AC  
**ELK0830-12** 800 lm, 3000K, 12V AC  
**ELK08SD-12** 800 lm, Sunset, 12V AC

## 6" Koto™ Dedicated LED ICA Housings



6" Standard ICA Housing  
**New Construction**



6" Standard Remodel ICA Housing  
**Remodel**



6" 2-Hour Fire Rated ICA Housing  
**New Construction**

CAT NO.	SPECIFICATIONS
EL770ICA	7" Height
EL760ICA	5 1/2" Height, Shallow

CAT NO.	SPECIFICATIONS
EL770RICA	7 1/2" Height
EL760RICA	5 1/2" Height, Shallow

CAT NO.	SPECIFICATIONS
EL76FICA	7 3/4" Height - Sound Rated
EL75FICAS	6 3/16" Height, Shallow