


4" Pinhole Trim

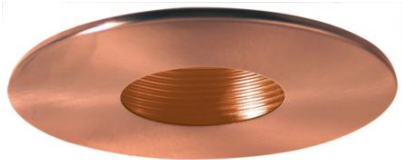

Features

- Pinhole.
- Lamp: 50W MAX PAR20 or R20.
- I.D.: 2", O.D.: 4 3/4".

Technical Details

Construction:

- Meticulously manufactured trim with a powder coated or anodized finish.
- Diecast trim ring for durability and lasting quality.
- Baffle helps reduce glare.

Installation: Clips securely mount trim into the housing and keeps ring flush with ceiling.

Compatible Housing: Compatible with 4"Line Voltage IC and Non-IC versions.

Lamp: Compatible with Medium base (E26) PAR type.

Options



Black w/White Ring



Nickel



Black



Bronze



Copper

Product Numbers

Item	Finish
EL990W	Black/White Ring
EL990N	Nickel
EL990BB	Black
EL990BZ	Bronze
EL990CP	Copper

Product Number Builder Example: EL990W

4" Pinhole Trim	Finish
EL990	
	W Black w/White Ring N All Nickel BB Black BZ All Bronze CP All Copper

Compatible Products

For use with 4" Trims for PAR Lamps



4" Line Voltage ICA Housings



4" Airtight IC Housing
Double Wall Construction

CAT NO.	SPECIFICATIONS
EL99ICA	Lamp: 50W MAX.



4" Airtight Housing
New Construction

CAT NO.	SPECIFICATIONS
EL99A	Lamp: 50W MAX.



4" Airtight IC Housing
New Construction

CAT NO.	SPECIFICATIONS
EL99LDICA	Lamp: LED 12W MAX.



4" Airtight IC Housing
Remodel

CAT NO.	SPECIFICATIONS
EL99RICA	Lamp: 50W MAX.



4" Housing
Remodel

CAT NO.	SPECIFICATIONS
EL99RA	Lamp: 50W MAX.



4" Airtight IC 2-Hour Fire Rated Housing
New Construction

CAT NO.	SPECIFICATIONS
EL99FICA	Lamp: 35W MAX.



4" Airtight IC Housing with GU24 Base Socket
New Construction

CAT NO.	SPECIFICATIONS
EL99ICA-G24	Lamp: 18W MAX.



4" Airtight IC Housing with GU24 Base Socket
Remodel

CAT NO.	SPECIFICATIONS
EL99RICA-G24	Lamp: 18W MAX.

4" Accessories



Fire Cover

CAT NO.	SPECIFICATIONS
FIRECVR	9 3/4" H x 17" O.D.



Fire Enclosure

CAT NO.	SPECIFICATIONS
FIREENCL	20 3/8" L x 14 3/8" W
FIREENCL-S	Shallow, 16" L x 14 3/8" W



Mica Fire Tape

CAT NO.	SPECIFICATIONS
FIRETAPE	3/4" W x 16' L