

# 6" LED Light Engine with Wall Wash Trim (850-3000 lm)



## Features

- Dimmable Triac/ELV or 0-10V.
- USA Designed and Assembled.
- Frame sold separately (see Compatible Housings).
- 2 at the end of the item number denotes Generation 2. Please note Gen 2 and Gen 1 are not cross compatible.

## Specifications

<b>Wattage</b>	8.8W - 31W
<b>Lumens</b>	850 lm - 3000 lm
<b>Color Temp.</b>	2700K - SunsetK
<b>Lamp Type</b>	LED
<b>Beam Angle</b>	60°
<b>CRI</b>	93+
<b>Wet Location</b>	Listed

## Options



Black



Chrome



Haze



Haze w/White Ring



White

## Technical Details

**Optics:** Frosted polycarbonate lens diffuses light evenly throughout while reducing glare with LED technology.

**Reflector Construction:** Reflector is one piece, deep, self-flanged construction spun from .05" thick High Grade Aluminum. Reflector allows for minimal glare and a strong glare cut-off. Wall wash reflector pushes light in one direction to evenly light up a wall or frame.

**Installation:** Must be installed on a Laurel System frame with compatible lumen rating. Frames are available for New Construction, Remodel and as a Retrofit Kit.

### LED Technology:


- Extremely accurate Color Rendering Index of 93+ CRI.
- Efficacy of >90 lumens per watt.
- Lumen Maintenance of 50,000 hours L70 Life based on LM80 standardized test results.
- Superior Thermal Management by utilizing ELCO Red heat sink.
- Instant On to Full Brightness technology.
- No LED pixilation.

### Listings:

- cULus Listed for Wet Location.
- RoHS Compliant.

**Warranty:** ELCO Products are built to last. 5-year Limited warranty.

## Dimensions



## Product Number Builder Example: E611L0827W2

ELCO 6" Wall Wash	Laurel	Lumens	Color Temp.	Finish
<b>E611</b>	<b>L</b>			

**08** 850 lm  
**12** 1250 lm  
**16** 1600 lm  
**20** 2000 lm  
**30** 3000 lm

**27** 2700K  
**30** 3000K  
**35** 3500K  
**40** 4000K  
**50** 5000K  
**SD** Sunset

**W** All White  
**B** All Black  
**C** All Chrome  
**H** All Haze  
**HW** Haze w/White Ring

Generation


Gen 1  
**2** Gen 2

# Compatible Products


For use with 6" Laurel™ Light Engines




## 6" Laurel™ Commercial LED Frames




**6" Architectural Frame**  
**E6LH**

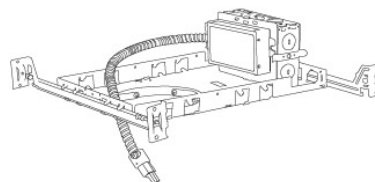

**6" Plaster Frame**  
**E6LF**



**6" Remodel Frame**  
**E6LR**



**6" Retrofit Kit**  
**E6LT**

### PRODUCT NUMBER BUILDER

Frame Type		Voltage	Lumen	Dimming	Optional	Generation
<input type="text"/>		<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>E6LH</b>	Architectural	<b>U</b> 120/277V	<b>08</b> 850 lm	<b>D</b> Triac/ELV/0-10V	<b>EM1</b> Emergency Backup up to 700 lm output	<b>(blank)</b> Gen 1
<b>E6LF</b>	Plaster		<b>12</b> 1250 lm	<b>S</b> Sunset	<b>EM2</b> Emergency Backup up to 1100 lm output	<b>2</b> Gen 2
<b>E6LR</b>	Remodel		<b>16</b> 1600 lm	<b>L</b> Lutron		
<b>E6LT</b>	Retrofit		<b>20</b> 2000 lm			
			<b>30</b> 3000 lm			
			<b>40</b> 4000 lm			
			<b>60</b> 6000 lm			