

8" CFL Vertical Downlight with Plaster Frame




Features

- 8" Vertical Architectural CFL Downlight.
- Energy efficient.
- Single wall construction.
- Integral thermal protector guards against improper lamping.
- Includes 24" captive bar hangers and plaster frame.
- Captive bar hangers span 24" joists and can be repositioned 90°.
- Pre-wired junction box provided with 1/2" and 3/4" knockouts.
- Maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out).
- Junction box provided with removable access plates.
- Housing adjusts 3/4" to accommodate various ceiling thickness.
- UL Listed for damp location and for feed through.

Specifications

| | |
|-----------------------------|-----------|
| Wattage | 26W - 42W |
| Voltage | 120/277V |
| Lamp Type | CFL |
| Damp Location Listed | |

Dimensions

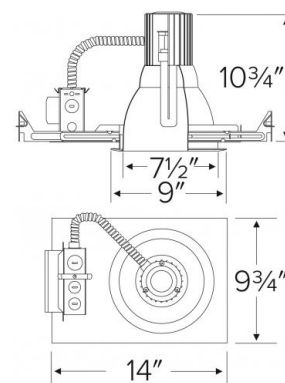

Product Numbers

| Item | Description | Lamp type | Watts | Voltage |
|-----------------|--|-----------|-------|----------|
| ELVF826E | 8" CFL Vertical Downlight with Plaster Frame | CFL | 26W | 120/277V |
| ELVF832E | 8" CFL Vertical Downlight with Plaster Frame | CFL | 32W | 120/277V |
| ELVF842E | 8" CFL Vertical Downlight with Plaster Frame | CFL | 42W | 120/277V |