

4" LED Light Engine with Wall Wash Trim



Features

- USA Designed and Assembled.
- Frame sold separately (see Compatible Housings).
- 2 at the end of the item number denotes Generation 2.
Please note Gen 2 and Gen 1 are not cross compatible.

Specifications

Wattage	8.8W - 31W
Lumens	850 lm - 3500 lm
Color Temp.	2700K - SunsetK
Lamp Type	LED
Beam Angle	60°
CRI	93+
Wet Location	Listed

Options



Technical Details

Optics: Frosted polycarbonate lens diffuses light evenly throughout while reducing glare with LED technology.

Reflector Construction: Reflector is one piece, deep, self-flanged construction spun from .05" thick High Grade Aluminum. Reflector allows for minimal glare and a strong glare cut-off. Wall wash reflector pushes light in one direction to evenly light up a wall or frame.

Installation: Must be installed on a Laurel System frame with compatible lumen rating. Frames are available for New Construction, Remodel and as a Retrofit Kit.

LED Technology:


- Extremely accurate Color Rendering Index of 93+ CRI.
- Efficacy of >90 lumens per watt.
- Lumen Maintenance of 50,000 hours L70 Life based on LM80 standardized test results.
- Superior Thermal Management by utilizing ELCO Red heat sink.
- Instant On to Full Brightness technology.
- No LED pixilation.

Listings:

- cULus Listed for Wet Location.
- RoHS Compliant.

Warranty: ELCO Products are built to last. 5-year Limited warranty.

Dimensions



Product Number Builder Example: E411L0827W2

ELCO 4" Wall Wash	Laurel	Lumens	Color Temp.	Finish
E411	L			

08 850 lm
12 1250 lm
16 1600 lm
20 2000 lm
30 3000 lm

27 2700K
30 3000K
35 3500K
40 4000K
50 5000K
SD Sunset

W All White
B All Black
C All Chrome
H All Haze
HW Haze w/ White Ring

Generation

Gen 1


2 Gen 2

Compatible Products


For use with 4" Laurel™ Light Engines




4" Laurel™ Commercial LED Frames




4" Architectural Frame
E4LH

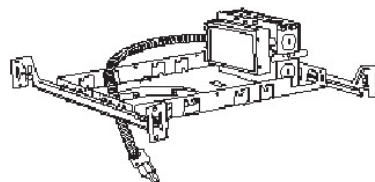

4" Plaster Frame
E4LF



4" Remodel Frame
E4LR



4" Retrofit Kit
E4LT

PRODUCT NUMBER BUILDER

Frame Type		Voltage	Lumen		Dimming	Optional		Generation	
<input type="text"/>		<input type="text"/>	<input type="text"/>		<input type="text"/>	<input type="text"/>		<input type="text"/>	
E4LH	Architectural	U 120/277V	08	850 lm	D Triac/ELV/0-10V	EM1	Emergency Backup up to 700 lm output	(blank)	Gen 1
E4LF	Plaster		12	1250 lm	S Sunset	EM2	Emergency Backup up to 1100 lm output	2	Gen 2
E4LR	Remodel		16	1600 lm	L Lutron				
E4LT	Retrofit		20	2000 lm					
			30	3000 lm					