

Pathway Lighting



LED **Brick Lights** & LED **Step Lights**

Ibis Collection

Moa Collection

Trogon Collection



ELCO Lighting

The Best Choice in Lighting



Indoors or outdoors, lighting a stairway improves safety and adds an inviting glow to your space. LED step lights can be used to enhance your landscape, to amplify your deck lighting when entertaining, for commercial exterior lighting, or simply to feel more secure knowing your staircase is brightly lit.

Introducing ELCO's **Ibis**, **Trogon**, and **Moa** Collections

Ibis Collection

ELCO's Ibis Collection consists of diecast wet location mini LED Step Lights which are offered in 3000K or 4000K, 120V or 12V AC/DC in round or rectangle with an Angled Louver, Open Frame Lens or Scoop Faceplate in a sharp White, Black, Nickel or Copper powder coated finish.



Moa Collection

ELCO's Moa Collection consists of damp location standard and mini LED Step Lights with or without a photocell which are offered in 3000K, 120V or 12V AC with an Angled Louver or Acrylic lens in a sharp White, Black, Nickel or Bronze powder coated finish.



Trogon Collection


ELCO's Trogon Collection consists of diecast wet location LED Brick Lights which are offered in 5.4W-12W, 3000K, 120V with an Angled Louver, Open Frame Lens or Grill Faceplate in a sharp White, Black or Bronze powder coated finish.



Ibis Collection

Mini Diecast LED Step Lights

ELCO's Ibis Collection consists of diecast wet location mini LED Step Lights which are offered in 2W or 3W, 3000K or 4000K, 120V or 12V AC/DC in round or rectangle with an Angled Louver, Open Frame Lens or Scoop Faceplate in a sharp White, Black, Nickel or Copper powder coated finish.



INTEGRATED LED



WET LOCATION



90+ CRI




50,000 HOURS



Mini LED Step Lights

Horizontal or Vertical




3000K / 2W / 12V	ELST9130W	ELST9130B	ELST9130N	ELST9130CP	ELST9130BZ
4000K / 2W / 12V	ELST9140W	ELST9140B	ELST9140N	ELST9140CP	ELST9140BZ
3000K / 2W / 120V	ELST9530W	ELST9530B	ELST9530N	ELST9530CP	ELST9530BZ
4000K / 2W / 120V	ELST9540W	ELST9540B	ELST9540N	ELST9540CP	ELST9540BZ

LED Mini Step Light with Open Faceplate

- Single Piece Diecast aluminum faceplate
- Powder Coated Faceplate
- Vertical or Horizontal Mounting
- Integrated LED board and driver
- Diffused lens behind faceplate
- Wet Location listed for indoor or outdoor use
- Mounts in a standard single gang box
- Life span of 50,000 hours L70

Input Power	2W
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	12V or 120V
Wet Location	ETL Listed
Rated	IP 67




3000K / 2W / 12V	ELST9230W	ELST9230B	ELST9230N	ELST9230CP	ELST9230BZ
4000K / 2W / 12V	ELST9240W	ELST9240B	ELST9240N	ELST9240CP	ELST9240BZ
3000K / 2W / 120V	ELST9630W	ELST9630B	ELST9630N	ELST9630CP	ELST9630BZ
4000K / 2W / 120V	ELST9640W	ELST9640B	ELST9640N	ELST9640CP	ELST9640BZ

LED Mini Step Light with Angled Louver

- Single Piece Diecast aluminum faceplate
- Powder Coated Faceplate
- Vertical Mounting
- Integrated LED board and driver
- Diffused lens behind faceplate
- Wet Location listed for indoor or outdoor use
- Mounts in a standard single gang box
- Life span of 50,000 hours L70

Input Power	2W
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	12V or 120V
Wet Location	ETL Listed
Rated	IP 67



Mini LED Step Lights




3000K / 2W / 12V	ELST9330W	ELST9330B	ELST9330N	ELST9330CP	ELST9330BZ
4000K / 2W / 12V	ELST9340W	ELST9340B	ELST9340N	ELST9340CP	ELST9340BZ
3000K / 2W / 120V	ELST9730W	ELST9730B	ELST9730N	ELST9730CP	ELST9730BZ
4000K / 2W / 120V	ELST9740W	ELST9740B	ELST9740N	ELST9740CP	ELST9740BZ

LED Mini Step Light with Angled Louver

- Single Piece Diecast aluminum faceplate
- Powder Coated Faceplate
- Horizontal Mounting
- Integrated LED board and driver
- Diffused lens behind faceplate
- Wet Location listed for indoor or outdoor use
- Mounts in a standard single gang box
- Life span of 50,000 hours L70

Input Power	2W
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	12V or 120V
Wet Location	ETL Listed
Rated	IP 67




3000K / 2W / 12V	ELST9430W	ELST9430B	ELST9430N	ELST9430CP	ELST9430BZ
4000K / 2W / 12V	ELST9440W	ELST9440B	ELST9440N	ELST9440CP	ELST9440BZ
3000K / 2W / 120V	ELST9830W	ELST9830B	ELST9830N	ELST9830CP	ELST9830BZ
4000K / 2W / 120V	ELST9840W	ELST9840B	ELST9840N	ELST9840CP	ELST9840BZ

LED Mini Step Light with Scoop

- Single Piece Diecast aluminum faceplate
- Powder Coated Faceplate
- Vertical Mounting
- Integrated LED board and driver
- Diffused lens behind faceplate
- Wet Location listed for indoor or outdoor use
- Mounts in a standard single gang box
- Life span of 50,000 hours L70

Input Power	2W
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	12V or 120V
Wet Location	ETL Listed
Rated	IP 67




Round Mini LED Step Lights




Round LED Mini Step Light with Open Faceplate

- Single Piece Diecast aluminum faceplate
- Powder Coated Faceplate
- Integrated LED board and driver
- Diffused lens behind faceplate
- Wet Location listed for indoor or outdoor use
- Mounts in a round junction box
- Life span of 50,000 hours L70

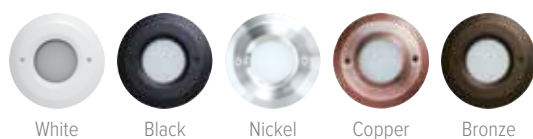


3000K / 3W / 12V	ELST8430W	ELST8430B	ELST8430N	ELST8430CP	ELST8430BZ
4000K / 3W / 12V	ELST8440W	ELST8440B	ELST8440N	ELST8440CP	ELST8440BZ
3000K / 3W / 120V	ELST8630W	ELST8630B	ELST8630N	ELST8630CP	ELST8630BZ
4000K / 3W / 120V	ELST8640W	ELST8640B	ELST8640N	ELST8640CP	ELST8640BZ

Input Power	3W
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	12V or 120V
Wet Location	ETL Listed
Rated	IP 67




Round LED Mini Step Light with Angled Louver

- Single Piece Diecast aluminum faceplate
- Powder Coated Faceplate
- Integrated LED board and driver
- Diffused lens behind faceplate
- Wet Location listed for indoor or outdoor use
- Mounts in a round junction box
- Life span of 50,000 hours L70

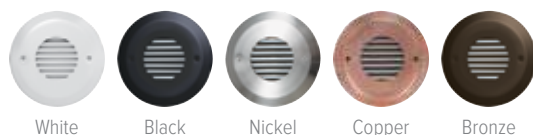

3000K / 3W / 12V	ELST8530W	ELST8530B	ELST8530N	ELST8530CP	ELST8530BZ
4000K / 3W / 12V	ELST8540W	ELST8540B	ELST8540N	ELST8540CP	ELST8540BZ
3000K / 3W / 120V	ELST8730W	ELST8730B	ELST8730N	ELST8730CP	ELST8730BZ
4000K / 3W / 120V	ELST8740W	ELST8740B	ELST8740N	ELST8740CP	ELST8740BZ


Input Power	3W
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	12V or 120V
Wet Location	ETL Listed
Rated	IP 67



Moa Collection

LED Step Lights

ELCO's Moa Collection consists of damp or wet location standard and mini LED Step Lights with or without a photocell which are offered in 3000K, 120V or 12V AC with an Angled Louver or acrylic lens in a sharp White, Black, Nickel or Bronze powder coated finish.




INTEGRATED LED




WET LOCATION



90+ CRI



DAMP LOCATION

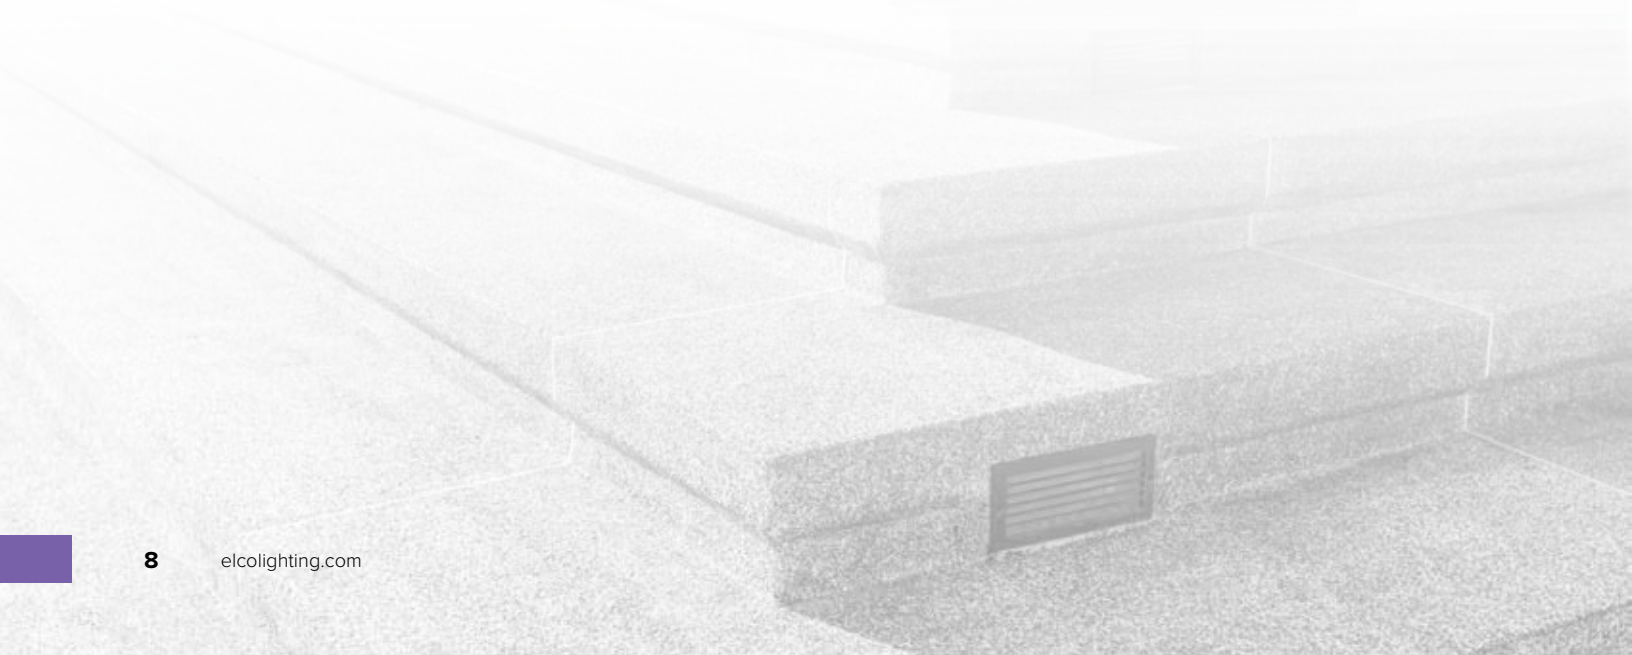

Mini LED Step Lights



White



Black



Bronze



Nickel

120V **ELST64W**
12V **ELST74W**

ELST64B
ELST74B

ELST64BZ
ELST74BZ

ELST64N
ELST74N



White



Black



Bronze



Nickel

120V **ELST65W**
12V **ELST75W**

ELST65B
ELST75B


ELST65BZ
ELST75BZ

ELST65N
ELST75N

Mini LED Step Light with Angled Louver

- Vertical Mounting
- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- Mounts in a standard single gang box
- Life span of 35,000 hours L70


Input Power	0.8W
Color Temp.	3000K
CRI	90+
Input Volt	12V or 120V
Wet Location	UL listed



Mini LED Step Light with Angled Louver

- Horizontal Mounting
- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- Mounts in a standard single gang box
- Life span of 35,000 hours L70

Input Power	0.8W
Color Temp.	3000K
CRI	90+
Input Volt	12V or 120V
Wet Location	UL listed



Mini LED Step Lights

Horizontal or Vertical



White

12V **ELST66W**
120V **ELST76W**



Black

ELST66B
ELST76B



Bronze

ELST66BZ
ELST76BZ




Nickel

ELST66N
ELST76N

Mini LED Step Light with Frosted Acrylic Lens

- Vertical or Horizontal Mounting
- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- Mounts in a standard single gang box
- Life span of 35,000 hours L70

Input Power	0.8W
Color Temp.	3000K
CRI	90+
Input Volt	12V or 120V
Wet Location	UL listed



White

ELST67W



Black

ELST67B



Bronze

ELST67BZ




Nickel

ELST67N

Mini Photocell LED Step Light with Angled Louver

- Energy saving photocell automatically turns unit on in the dark
- Vertical Mounting
- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- Mounts in a standard single gang box
- Life span of 35,000 hours L70

Input Power	0.75W
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed



Mini LED Step Lights



White

ELST68W



Black

ELST68B



Bronze

ELST68BZ



Nickel

ELST68N

Mini Photocell LED Step Light with Angled Louver

- Energy saving photocell automatically turns unit on in the dark
- Horizontal Mounting
- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- Mounts in a standard single gang box
- Life span of 35,000 hours L70


Input Power 0.75W

Color Temp. 3000K


CRI 90+

Input Volt 120V

Wet Location UL listed



Vertical or Horizontal



White

ELST69W



Black

ELST69B



Bronze

ELST69BZ



Nickel

ELST69N

Mini Photocell LED Step Light with Frosted Acrylic Lens

- Energy saving photocell automatically turns unit on in the dark
- Vertical or Horizontal Mounting
- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- Mounts in a standard single gang box
- Life span of 35,000 hours L70


Input Power 0.75W

Color Temp. 3000K

CRI 90+

Input Volt 120V

Wet Location UL listed



LED Step Lights



White

ELST20W



Black

ELST20B




Bronze

ELST20BZ

LED Step Light with Frosted Glass Lens

- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- UL Listed for direct contact with insulation
- Side brackets for mounting to wood
- Life span of 35,000 hours L70
- Includes hanger bar tabs (sold separately)

Input Power	2W
Color Temp.	3000K
CRI	90+
Input Volt	120V
Damp Location	UL listed



White

ELST21W



Black

ELST21B




Bronze

ELST21BZ

LED Step Light with Angled Louver

- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- UL Listed for direct contact with insulation
- Side brackets for mounting to wood
- Life span of 35,000 hours L70
- Includes hanger bar tabs (sold separately)

Input Power	2W
Color Temp.	3000K
CRI	90+
Input Volt	120V
Damp Location	UL listed



LED Step Lights



White

ELST22W




Black

ELST22B



Bronze

ELST22BZ

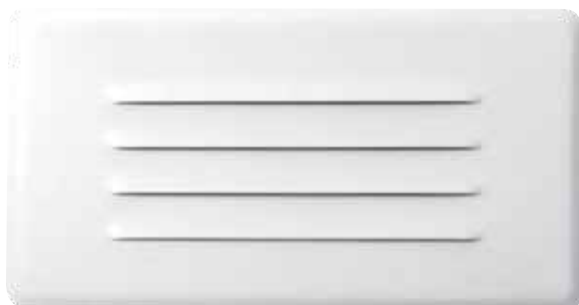

White

ELST23W



Black

ELST23B




Bronze

ELST23BZ

LED Step Light with Frosted Glass Lens

- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- UL Listed for direct contact with insulation
- Side brackets for mounting to wood
- Pre-wired junction box provided with 1/2" and 3/4" knockout for through branch wiring
- Life span of 35,000 hours L70
- Includes hanger bar tabs (sold separately)


Input Power	2W
Color Temp.	3000K
CRI	90+
Input Volt	120V
Damp Location	UL listed



LED Step Light with Angled Louver

- Galvanized stamped steel housing
- Powder coated faceplate
- Integrated LED board and driver
- UL Listed for direct contact with insulation
- Side brackets for mounting to wood
- Pre-wired junction box provided with 1/2" and 3/4" knockout for through branch wiring
- Life span of 35,000 hours L70
- Includes hanger bar tabs (sold separately)


Input Power	2W
Color Temp.	3000K
CRI	90+
Input Volt	120V
Damp Location	UL listed



Trogon Collection

Diecast LED Brick Lights

ELCO's Trogon Collection consists of diecast wet location LED Brick Lights which are offered in 5.4W or 12W, 3000K, 120V with an Angled Louver, Open Frame Lens or Grill Faceplate in a sharp White, Black or Bronze powder coated finish.



INTEGRATED LED



WET LOCATION



90+ CRI



LED Brick Lights



White
ELST81W



Black
ELST81B



Bronze
ELST81BZ



White
ELST82W



Black
ELST82B




Bronze
ELST82BZ

LED Brick Light with Angled Louver

- Diecast aluminum housing and faceplate
- Integrated LED board and driver
- Diffused glass lens behind louver
- Wet Location listed for indoor or outdoor use
- UL Listed for poured concrete
- UL Listed for direct contact with insulation (type IC)
- Housing equipped with (2) side brackets and (2) 1/2" knockouts for easy wiring
- Life span of 35,000 hours L70


Input Power	5.4W
Lumens	340
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed




LED Brick Light with Grill Faceplate

- Diecast aluminum housing and faceplate
- Integrated LED board and driver
- Diffused glass lens behind grill
- Wet Location listed for indoor or outdoor use
- UL Listed for poured concrete
- UL Listed for direct contact with insulation (type IC)
- Housing equipped with (2) side brackets and (2) 1/2" knockouts for easy wiring
- Life span of 35,000 hours L70

Input Power	5.4W
Lumens	340
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed



LED Brick Lights

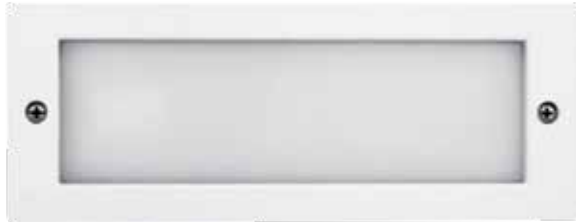

White
ELST83W



Black
ELST83B






Bronze
ELST83BZ

LED Brick Light with Open Faceplate

- Diecast aluminum housing and faceplate
- Integrated LED board and driver
- Diffused glass lens behind faceplate
- Wet Location listed for indoor or outdoor use
- UL Listed for poured concrete
- UL Listed for direct contact with insulation
- Housing equipped with (2) side brackets and (2) 1/2" knockouts for easy wiring
- Life span of 35,000 hours L70



Input Power	5.4W
Lumens	340
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed

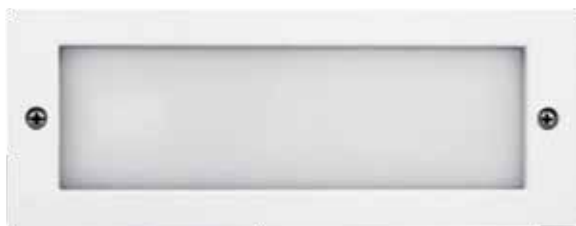

High Tech LED Brick Light with Open Faceplate

- Diecast aluminum housing and faceplate
- Integrated LED board and driver
- Diffused glass lens behind faceplate
- Wet Location listed for indoor or outdoor use
- UL Listed for poured concrete
- Housing equipped with (2) side brackets and (2) 1/2" knockouts for easy wiring
- Life span of 35,000 hours L70

Input Power	12W
Lumens	1000
Color Temp.	3000K
CRI	90+
Input Volt	120V
Wet Location	UL listed



White
ELST84W



Black
ELST84B



Bronze
ELST84BZ

Accessories

Trogon Collection



Brick Grill Faceplate Replacement

PST1 W White
PST1 B Black
PST1 BZ Bronze



Brick Louver Faceplate Replacement

PST4 W White
PST4 B Black
PST4 BZ Bronze



Brick Open Faceplate Replacement

PST5 W White
PST5 B Black
PST5 BZ Bronze



Replacement Lens for Brick Lights

PST2L
Lens



LED Module Replacement

PST80
340 lm / 3000K / 5.4W
Includes driver

Moa Collection




Step Replacement Louver Faceplate

For ELST23 9½" x 5¾"	For ELST21 9½" x 5"
ELST12W White	ELST10W White
ELST12B Black	ELST10B Black
ELST12BZ Bronze	ELST10BZ Bronze



Step Replacement Open Faceplate

For ELST22 9½" x 5¾"	For ELST20 9½" x 5"
ELST13W White	ELST11W White
ELST13B Black	ELST11B Black
ELST13BZ Bronze	ELST11BZ Bronze

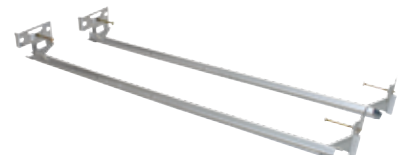

Hanger Bars (Set of 2)

HB24

Photometrics

Ibis Collection


Item: **ELST9540**

ISO FOOTCANDLE LINES OF
HORIZONTAL ILLUMINANCE

Distance in Units of Mounting Height

Values Based On 1.5 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(+) = Maximum Candela Point

Footcandle Legend:

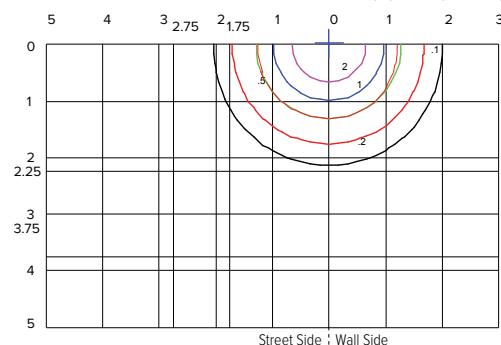

Street Side : Wall Side


Item: **ELST9840**

ISO FOOTCANDLE LINES OF
HORIZONTAL ILLUMINANCE

Distance in Units of Mounting Height

Values Based On 1.5 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(+) = Maximum Candela Point

Footcandle Legend:

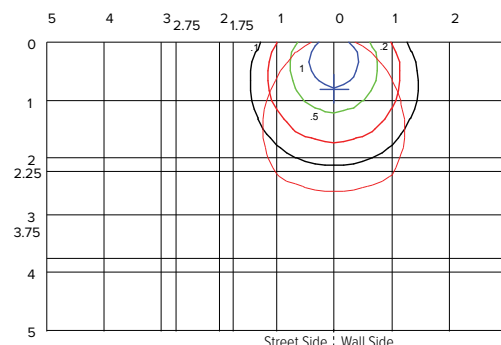

Street Side : Wall Side


Item: **ELST9730**

ISO FOOTCANDLE LINES OF
HORIZONTAL ILLUMINANCE

Distance in Units of Mounting Height

Values Based On 1.5 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(+) = Maximum Candela Point

Footcandle Legend:

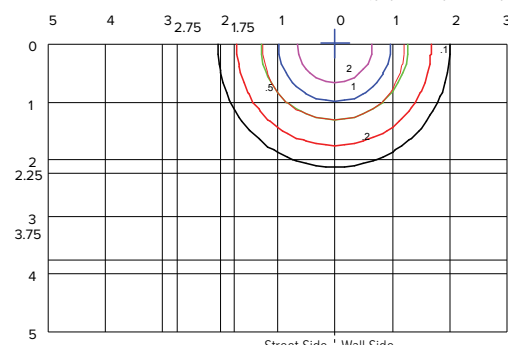

Street Side : Wall Side


Item: **ELST8640**

ISO FOOTCANDLE LINES OF
HORIZONTAL ILLUMINANCE

Distance in Units of Mounting Height

Values Based On 1.5 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(+) = Maximum Candela Point

Footcandle Legend:

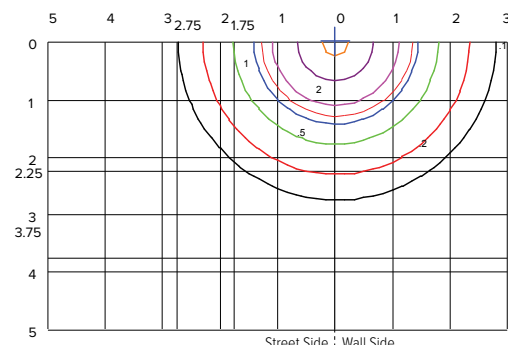

Street Side : Wall Side


Item: **ELST8740**

ISO FOOTCANDLE LINES OF
HORIZONTAL ILLUMINANCE

Distance in Units of Mounting Height

Values Based On 1.5 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(+) = Maximum Candela Point

Footcandle Legend:

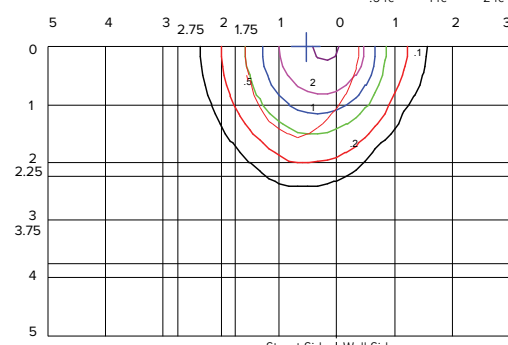

Street Side : Wall Side



Over two and a half decades ago, in the heart of Los Angeles, ELCO Lighting was founded on the philosophy that high quality lighting products should be sold at a fair market price. Our commitment to this philosophy and dedication to exceptional customer service serve as the very soul of our company. We take pride in our perpetual commitment to such standards that enable us to continually prosper in a highly competitive and unpredictable industry.

With our expanding LED product line that entails recessed, track, undercabinet, outdoor and emergency lighting, we are ready to fulfill a variety of lighting demands. Quality engineering, fair market value, professional customer service, and micro-managed inventory are the cornerstones of ELCO Lighting.

ELCAT1046



Customer Service

800.522.2626
customerservice@elcolighting.com
sales@elcolighting.com

Corporate Headquarters

2042 E. Vernon Ave.
Vernon, CA 90058
323.231.2600
elcolighting.com

Printed in the U.S.A.
\$18.00

© ELCO Lighting. The marks appearing in this catalog are registered trademarks of ELCO Lighting. Other marks used herein are recognized trademarks of their respective companies.

Products shown in this brochure may be covered by U.S. and international patents.
Specifications subject to change without notice.