ELCO Lighting



NEW Koto[™] System

ED Module

Works with 2", 3", 4", and 6" ELCO **0-10V** Recessed Housings & Koto™ Trims









Standard DX Koto™ LED Module

- 11.8W. 1000 lm
- Integrated 120/277V, 0-10V/Triac/ELV dimmable driver
- Excellent color rendering 95+ CRI
- · Sunset Module starts from 3000K and dims to 1800K
- Works in 2", 3", 4" and 6" ELCO 0-10V Housings with Koto™ twist-on trims
- · Energy Star Certified
- Title 24 JA8-2019 Compliant
- · Standard 38° Lens installed, 25° and 60° lens included with each module. Optional Lens: 18° (EP731C).
- Optional: Louver (L45), Linear Lens (L46), Spread Lens (L47), Clear Lens (L48), Frosted Lens (L49), Color Shifter (L51)
- Covered by U.S. Patents and Patents Pending

2700K	3000K	3500K	4000K	SUNSET
ELK10DX27	ELK10DX30	ELK10DX35	ELK10DX40	ELK10DXSD
















For our entire selection of Koto™ System Trims & 0-10V Recessed Housings please visit us at elcolighting.com

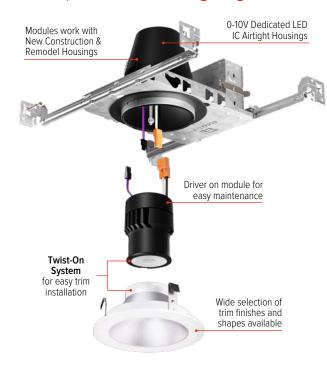



Also check out our Koto™ Field Changeable Accessories at **elcolighting.com**

Subject to US tariffs. All other standards, terms and conditions apply. Please provide your e-mail address to salesadmin@elcolighting.com. To unsubscribe e-mail: salesadmin@elcolighting.com





