

Introducing our **NEW ARCHITECTURAL**

Oak™ Trimless Downlights

Our smallest LED recessed downlight engineered to squeeze into the tiniest of spaces, yet still provide enough power to light up the surroundings. Designed to seamlessly make the trim ring invisible, showing only the reflector and lens with no visible trim ring. Our Trimless Light Engines slides in-&-out of a finished ceiling with the ease of a click.

1" Round Trimless Downlights

- Requires Trimless Spackle Frame (ELO1SFR) sold separately
- Delivers up to 1000 lumens
- Wet location rated
- IC Airtight for direct contact with insulation

Lumens: 850 - 1000 lm
Color Temp: 2700K - 4000K, Sunset
CRI: 93+

DIMS TO WARM
SUNSET DIMMING TECHNOLOGY



Product Number Builder

Trimless Downlight	Style	Beam Angle	Color Temp.	Finish
E1AK	61 Round	F 38° (Standard) NF 28° WF 50°	27 2700K 30 3000K 35 3500K 40 4000K SD Sunset	W All White B All Black BZ All Bronze

Example: **E1AK61FSDDB** [1" Round Trimless Downlight, 38° Beam Angle, Sunset, All Black]

New Construction Applications

- Driver included

Oak™ R60 IC
Airtight New
Construction Housing



E1TRL08AJC 120V, Triac/ELV
E1TRL08AJCDX 120/277V, 0-10V/Triac/ELV

Oak™ IC
New Construction
Frame



E1TRL08IC 120V, Triac/ELV
E1TRL08ICDX 120/277V, 0-10V/Triac/ELV


Remodel Application

- Mounting Frames available

Oak™ IC Remodel
Power Pack



E1RLA08IC 120V, Triac/ELV
E1RLA08ICDX 120/277V, 0-10V/Triac/ELV

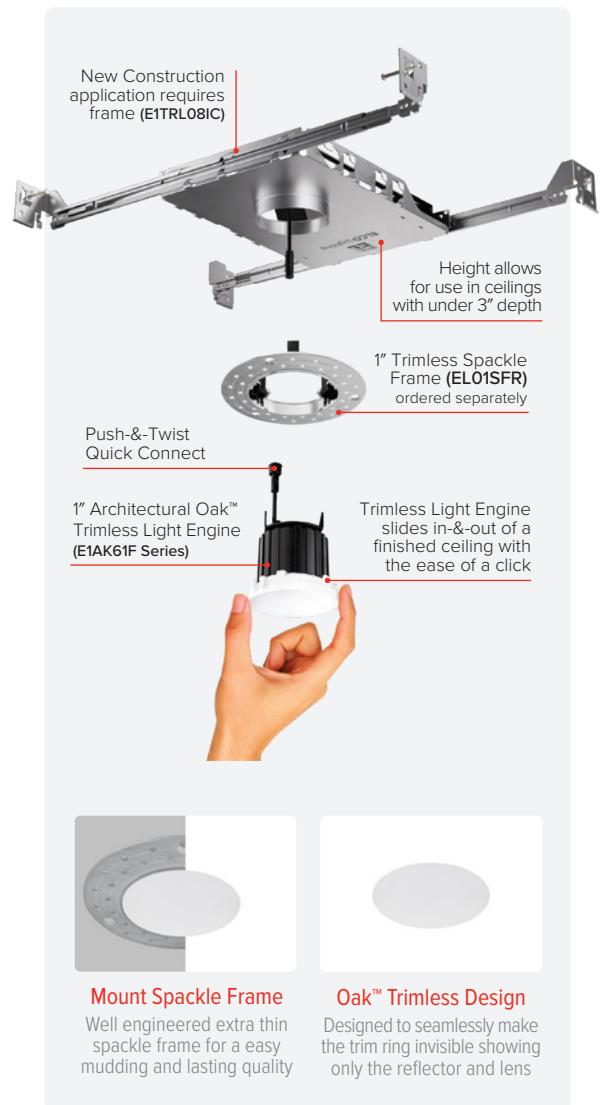

Download a **FREE** digital copy of our Architectural Oak™ System Catalog (ELCAT1069) at elcolighting.com



Subject to US tariffs. All other standards, terms and conditions apply.
Please provide your e-mail address to salesadmin@elcolighting.com. To unsubscribe e-mail: salesadmin@elcolighting.com



E-mail your order to: orderdesk@elcolighting.com
Tel: **800.522.2626** • Fax: **800.644.2626**

ELCO Lighting
The Best Choice in Lighting