

Outdoor LED Diecast Light with Emergency Battery Backup




Features

- 120/277V AC
- 10W high power LED lamp (700 lm, 5000K)
- Diecast aluminum fixture for normal and emergency operation.
- Test switch and charge rate indicator with self-diagnostic charging circuit.
- Rechargeable Ni-Cad battery (6V 5ah) delivers more than 90 minutes of emergency operation.
- 0°C minimum temperature.
- ETL Listed for wet location.
- Includes photo-sensor

Specifications

| | |
|----------------------|------------|
| Wattage | 10W |
| Voltage | 120/277V |
| Wet Location | Yes |
| Damp Location | ETL Listed |

Dimensions

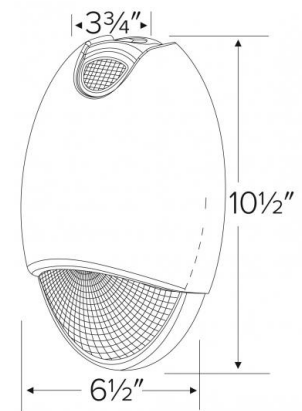

Product Numbers

| Item | Watts | Voltage | Finish |
|----------------|-------|----------|------------|
| EE91LW | 10W | 120/277V | All White |
| EE91LBZ | 10W | 120/277V | All Bronze |