

# 6" Airtight Remodel IC Housing with GU24 Base Socket




## Features

- Airtight Remodel Housing for insulated ceilings.
- Adjustable socket bracket.
- Lamp: 27W MAX. Self ballasted 120V CFL lamp (GU24 base).
- Housing meets California Title 24 requirements (with LED insert only).
- cUL listed for damp location and for feed through.

## Specifications

<b>Wattage</b>	27W
<b>Voltage</b>	120V
<b>Lamp Type</b>	Medium Base (E26)
<b>Damp Location</b>	Listed

## Dimensions

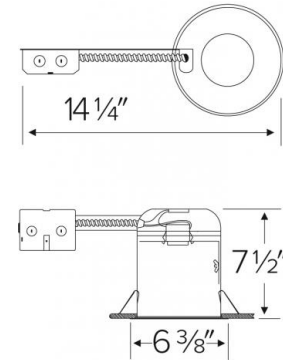

## Technical Details

### Construction:

- IC rated for direct contact with insulation, for use in IC or non-IC conditions.
- Housing adjusts in frame to accommodate up to 1 1/4" ceiling thickness.
- Airtight housing with gasket to restrict airflow in accordance with ASTM E-283 air-tight requirements.
- Aluminum housing for greater heat dissipation.

**Installation:** Designed for ceiling plenums where 2x8 joists or taller are used. Maximum hole cutout is 6 3/4". See installation sheet for detailed information.

### Electrical:

- Input Voltage: 120V AC.
- Thermally protected against improper lamping.

**Trims:** Compatible with ELCO 6" Line Voltage PAR trims.

**Lamp:** Designed for use with 27W MAX Self ballasted CFL, GU24 base.

### Listings:

- cUL Listed for Damp Location.
- cUL Listed for Feed Through.
- cUL Listed for Direct Contact with Insulation and Combustible Material.
- Airtight per ASTM E-283.
- Install a JA8-2016-E lamp/luminaire for Title 24 Compliance.

**Warranty:** ELCO Lighting warrants products will be free from defects in materials and workmanship for a period of 3 years.

## Product Numbers

Item	Lamp type	Watts	Voltage
<b>EL7RICA-G24</b>	Medium Base (E26)	27W	120V