

6" LED Light Engine with Adjustable Reflector Trim

The perfect lighting solution for high-end residential and light commercial projects.



Features

- High efficacy LED module.
- Triac/ELV/0-10V dimming.
- Life span of 50,000 hours L70.
- USA designed and assembled.
- Limited 5 year warranty.
- 2 at the end of the item number denotes Generation 2. Please note Gen 2 and Gen 1 are not cross compatible.

Specifications

| | |
|----------------------|---------|
| Wattage | 12.88W |
| Lumens | 1250 lm |
| Color Temp. | 4000K |
| Lamp Type | LED |
| Beam Angle | 60° |
| CRI | 93+ |
| Damp Location | Listed |

Options



All White



All Bronze



Black w/White Trim

Technical Details

Optics: Frosted polycarbonate module lens diffuses light evenly throughout while reducing glare with LED technology.

Trim Construction: Reflector is two piece trim for maximum color versatility. Design allows for minimal glare and a strong glare cut-off. Trim is constructed of metal for lasting durability.

Installation: Must be installed on a Cedar™ System frame with compatible lumen rating. Frames are available for New Construction and Remodel as IC or non-IC.


LED Technology:

- Extremely accurate Color Rendering Index of 93+.
- Efficacy of 97 lumens per watt.
- Lumen Maintenance of 50,000 hours L70 Life based on LM80 standardized test results.
- Superior Thermal Management by utilizing ELCO Red heat sink.
- Instant On to Full Brightness technology.
- No LED pixelation.

Sunset: Sunset color temperature is our dim-to-warm LED technology that allows the color temperature to become warmer as the product is dimmed. Our SUNSET items start at 3000K and go as low as 1800K when dimmed. For Sunset dim technology be sure to order an item with "Sunset" in the Color Temperature (CCT) attribute.

Listings: cUL Listed for Wet Location. RoHS Compliant. California Title 24 (JA8-2016-E).

Dimensions

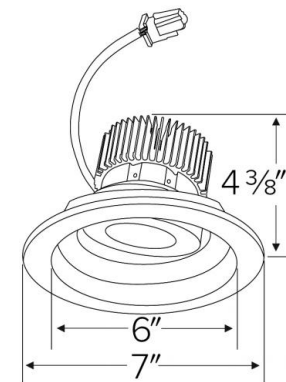

Product Number Builder

Example: **E617C0827W2**

ELCO 6" Adjustable Reflector

Lumens

Color Temp.

Finish

Generation

Beam Angle

E617C

08 850 lm

12 1250 lm

16 1600 lm

20 2000 lm

27 2700K

30 3000K

35 3500K

40 4000K

50 5000K

SD Sunset ¹

W All White

BZ All Bronze

B Black with White Trim

2 Gen 2

1 Gen 1

60° lens

-F 38° lens

-N 24° lens

-S 15° lens

¹ Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

Compatible Products

For use with 6" Cedar™ Light Engines

6" Cedar™ Dedicated LED ICA Housings




2-Hour Fire Rated
6" ICA Housing
New Construction

| CAT NO. | SPECIFICATIONS |
|---------|----------------|
| E6FH | Up to 1250lm |




6" ICA Housing
New Construction

| CAT NO. | SPECIFICATIONS |
|---------|----------------|
| E6LC | Up to 2000lm |



6" ICA Housing
New Construction


| CAT NO. | SPECIFICATIONS |
|---------|----------------|
| E6LC | Up to 1250lm |



6" ICA Housing
Remodel


| CAT NO. | SPECIFICATIONS |
|---------|----------------|
| E6LRC | Up to 1250lm |

6" Cedar™ Dedicated LED Non-IC Housings



6" Non-IC Housing
New Construction

| CAT NO. | SPECIFICATIONS |
|---------|----------------|
| E6LC | Up to 2000lm |



6" Non-IC Housing
Remodel

| CAT NO. | SPECIFICATIONS |
|---------|----------------|
| E6LRC | Up to 2000lm |

PRODUCT NUMBER BUILDER

| Housing Type | Lumen | ICA Airtight | Dimming | Optional |
|------------------------------|----------------------|------------------------|-----------------------------------|--|
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| E6FH Fire Rated | 08 850 lm | (Blank) Non-IC | (Blank) 120V Triac/ELV | EM1 Emergency Backup up to 700 lm output |
| E6LC New Construction | 12 1250 lm | ICA IC Airtight | D 120/277V Triac/ELV/0-10V | EM2 Emergency Backup up to 1100 lm output |
| E6LRC Remodel | 16 1600 lm | | L Lutron | |
| | 20 2000 lm | | | |